

Software Design, Modelling and Analysis in UML

Lecture 22: Meta-Modelling

2015-02-10

Prof. Dr. Andreas Podelski, Dr. Bernd Westphal

Albert-Ludwigs-Universität Freiburg, Germany

– 22 – 2015-02-10 – main –

Contents & Goals

Last Lecture:

- Inheritance in UML: concrete syntax
- Liskov Substitution Principle — desired semantics

This Lecture:

- **Educational Objectives:** Capabilities for following tasks/questions.

- What's the Liskov Substitution Principle?
- What is late/early binding?
- What is the subset, what the uplink semantics of inheritance?
- What's the effect of inheritance on LSCs, State Machines, System States?

- What's the idea of Meta-Modelling?
- *How to read the OMG UML standard documents*

- **Content:**

- The UML Meta Model
- Wrapup & Questions

– 22 – 2015-02-10 – Prelim –

Meta-Modelling: Idea and Example

Meta-Modelling: Why and What

- **Meta-Modelling** is one major prerequisite for understanding
 - the standard documents [OMG, 2007a, OMG, 2007b], and
 - the MDA ideas of the OMG.
- The idea is **simple**:
 - if a **modelling language** is about modelling **things**,
 - and if UML models are and comprise **things**,
 - then why not **model** those in a modelling language?
- In other words:

Why not have a model \mathcal{M}_U such that

 - the set of legal instances of \mathcal{M}_Uis
 - the set of well-formed (!) UML models.

Meta-Modelling: Example


- For example, let's consider a class.
- A **class** has (on a superficial level)
 - a **name**,
 - any number of **attributes**,
 - any number of **behavioural features**.

Each of the latter two has

- a **name** and
- a **visibility**.

Behavioural features in addition have


- a boolean attribute **isQuery**,
 - any number of parameters,
 - a return type.
- Can we model this (in UML, for a start)?

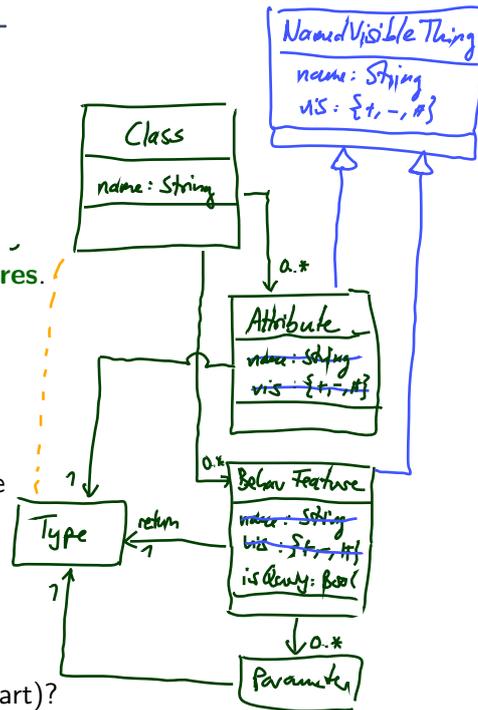

- 22 - 2015-02-10 - Smm -

5/63

UML Meta-Model: Extract from UML 2.0 Standard

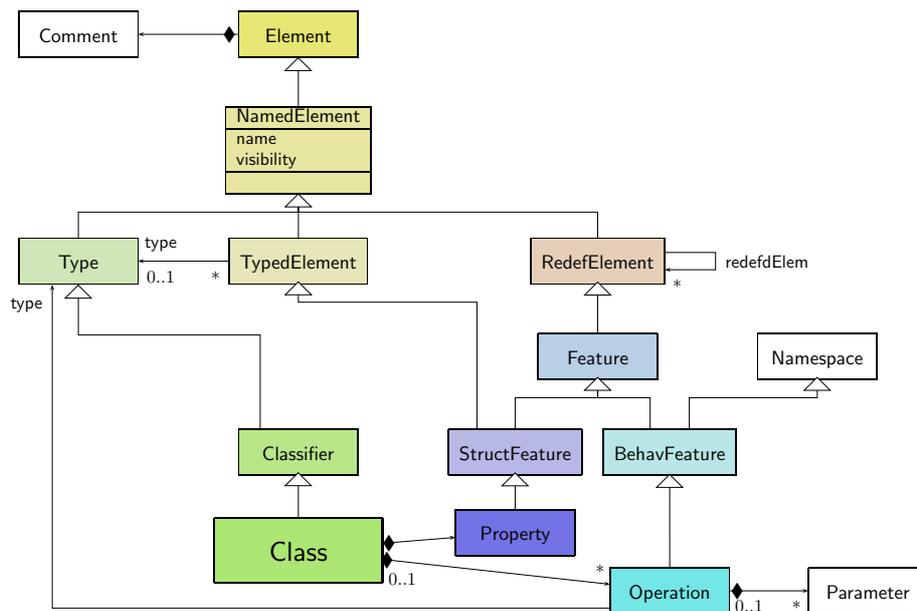


- 22 - 2015-02-10 - Smm -

6/63

Meta-Modelling: Principle

Modelling vs. Meta-Modelling

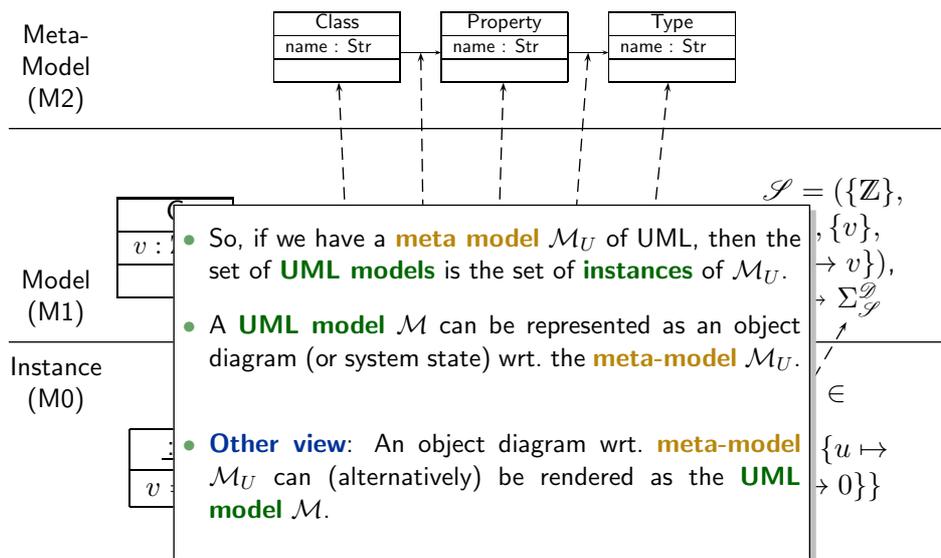

Well-Formedness as Constraints in the Meta-Model

- The set of **well-formed UML models** can be defined as the set of object diagrams satisfying all constraints of the **meta-model**.

For example,

“[2] Generalization hierarchies must be directed and acyclical. A classifier cannot be both a transitively general and transitively specific classifier of the same classifier.

not self . allParents() -> includes(self)” [OMG, 2007b, 53]


- The other way round:

Given a **UML model** \mathcal{M} , unfold it into an object diagram O_1 wrt. \mathcal{M}_U .

If O_1 is a **valid** object diagram of \mathcal{M}_U (i.e. satisfies all invariants from $Inv(\mathcal{M}_U)$), then \mathcal{M} is a well-formed UML model.

That is, if we have an object diagram **validity checker** for of the meta-modelling language, then we have a **well-formedness checker** for UML models.

Claim: Extract from UML 2.0 Standard

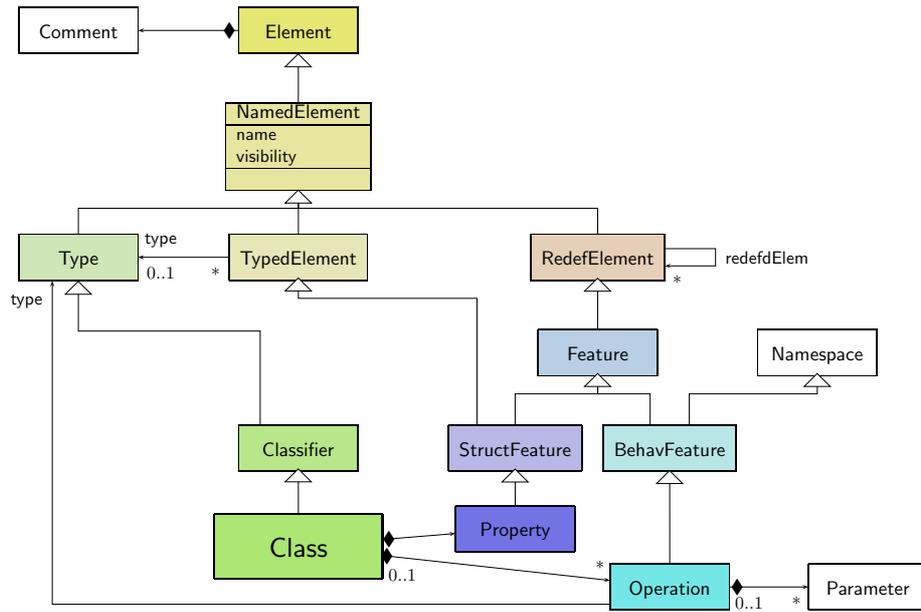

— 22 — 2015-02-10 — Sumlmm —

Classes [OMG, 2007b, 32]

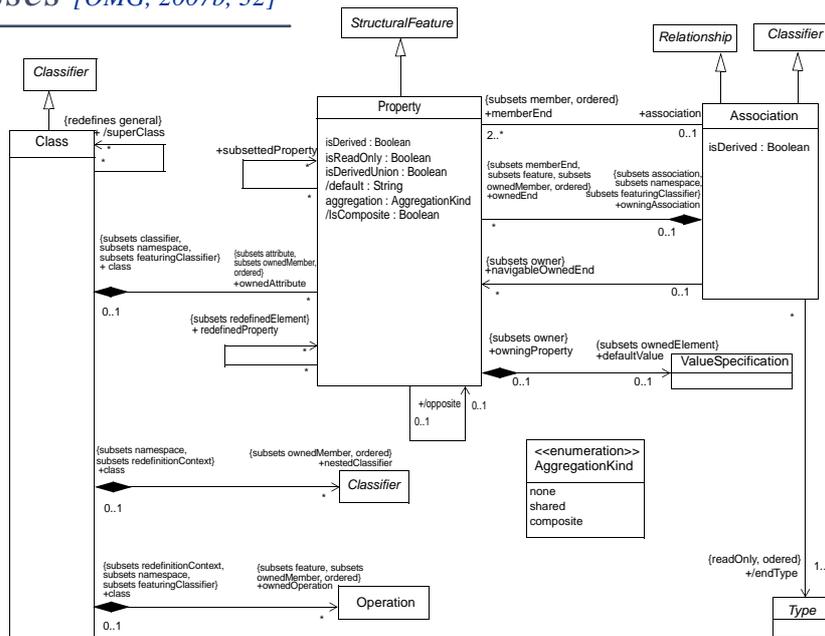


Figure 7.12 - Classes diagram of the Kernel package

— 22 — 2015-02-10 — Sumlmm —

Operations [OMG, 2007b, 31]

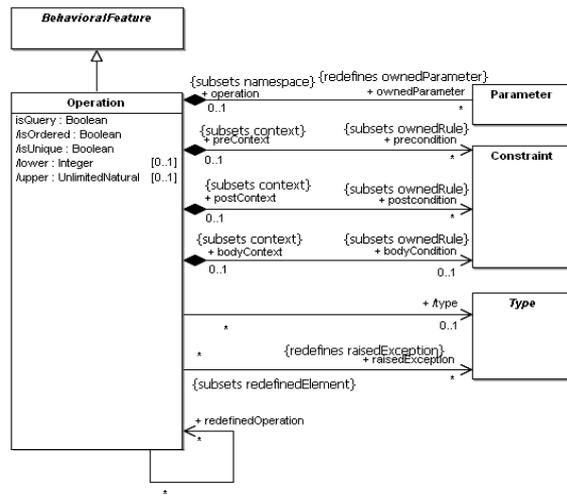


Figure 7.11 - Operations diagram of the Kernel package

- 22 - 2015-02-10 - Summm -

Operations [OMG, 2007b, 30]

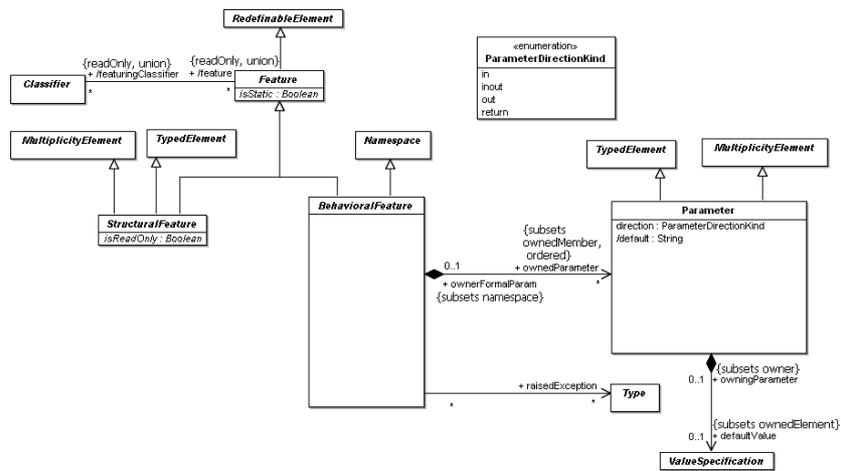


Figure 7.10 - Features diagram of the Kernel package

- 22 - 2015-02-10 - Summm -

Classifiers [OMG, 2007b, 29]

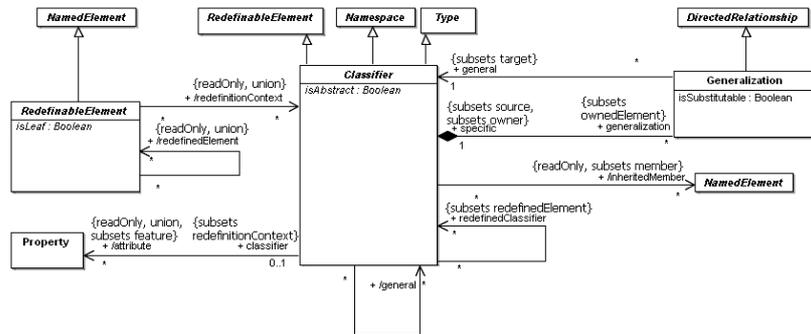


Figure 7.9 - Classifiers diagram of the Kernel package

Namespaces [OMG, 2007b, 26]

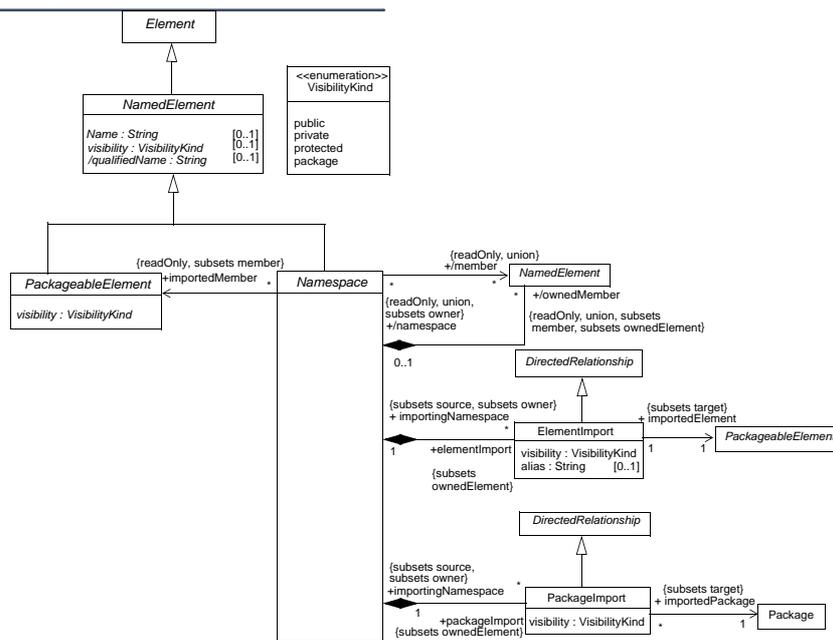


Figure 7.4 - Namespaces diagram of the Kernel package

Root Diagram [OMG, 2007b, 25]

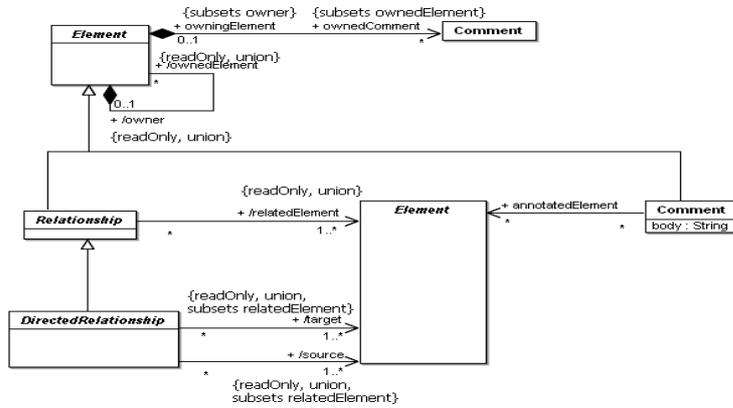


Figure 7.3 - Root diagram of the Kernel package

- 22 - 2015-02-10 - Summm -

Interesting: Declaration/Definition [OMG, 2007b, 424]



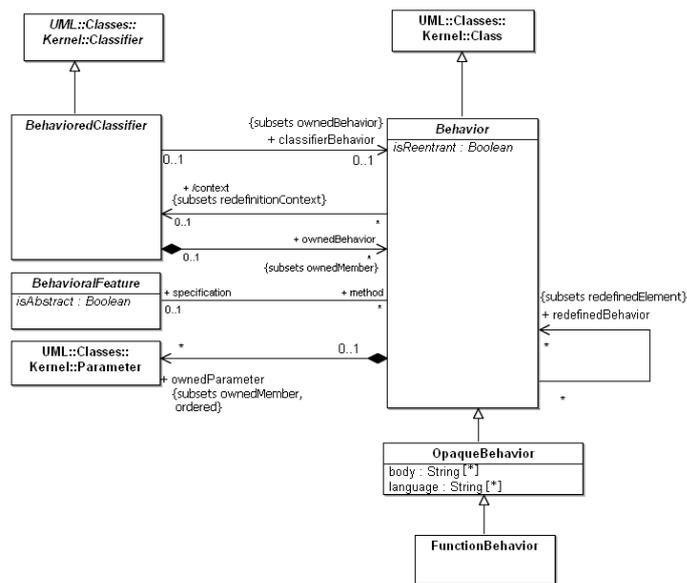


Figure 13.6 - Common Behavior

- 22 - 2015-02-10 - Summm -

UML Architecture [OMG, 2003, 8]

- Meta-modelling has already been used for UML 1.x.
- For UML 2.0, the request for proposals (RFP) asked for a separation of concerns: **Infrastructure** and **Superstructure**.
- **One reason:** sharing with MOF (see later) and, e.g., CWM.

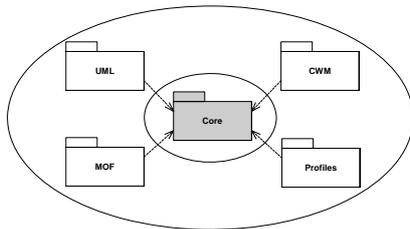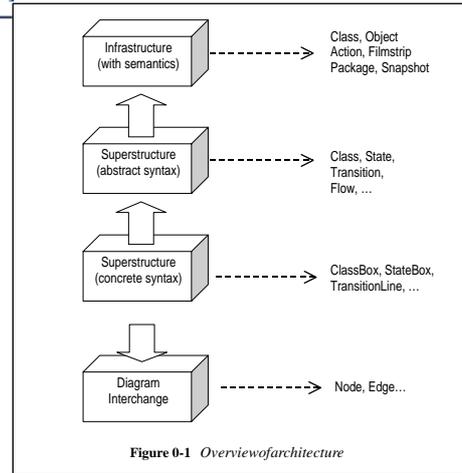

– 22 – 2015-02-10 – Sw/whole –

19/63

UML Superstructure Packages [OMG, 2007a, 15]

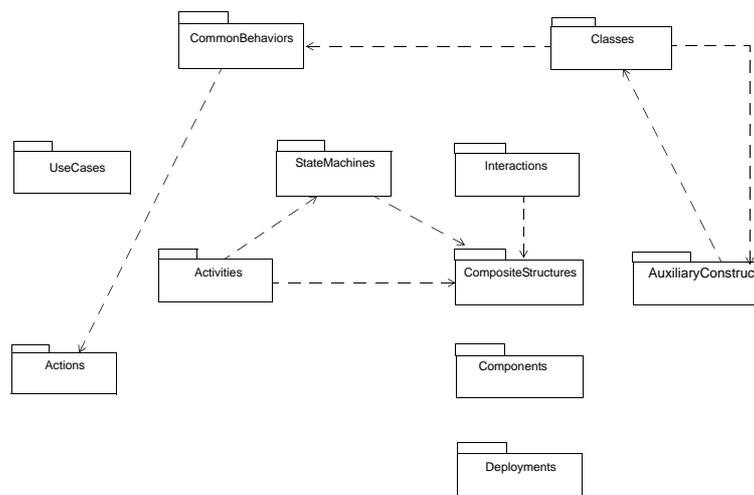


Figure 7.5 - The top-level package structure of the UML 2.1.1 Superstructure

– 22 – 2015-02-10 – Sw/whole –

20/63

Reading the Standard

– 22 – 2015-02-10 – Reading –

Table of Contents	
1. Scope	1
2. Conformance	1
2.1 Language Units	2
2.2 Compliance Levels	2
2.3 Meaning and Types of Compliance	6
2.4 Compliance Level Contents	8
3. Normative References	10
4. Terms and Definitions	10
5. Symbols	10
6. Additional Information	10
6.1 Changes to Adopted OMG Specifications	10
6.2 Architectural Alignment and MDA Support	10
6.3 On the Run-Time Semantics of UML	11
6.3.1 The Basic Premises	11
6.3.2 The Semantics Architecture	11
6.3.3 The Basic Causality Model	12
6.3.4 Semantics Descriptions in the Specification	13
6.4 The UML Metamodel	13
6.4.1 Models and What They Model	13
6.4.2 Semantic Levels and Naming	14
6.5 How to Read this Specification	15
6.5.1 Specification format	15
6.5.2 Diagram format	18
6.6 Acknowledgements	19
Part I - Structure	21
7. Classes	23

UML Superstructure Specification, v2.1.2 i

21/63

Reading the Standard

– 22 – 2015-02-10 – Reading –

Table of Contents	
1. Scope	1
2. Conformance	1
2.1 Language Units	2
2.2 Compliance Levels	2
2.3 Meaning and Types of Compliance	6
2.4 Compliance Level Contents	8
3. Normative References	10
4. Terms and Definitions	10
5. Symbols	10
6. Additional Information	10
6.1 Changes to Adopted	10
6.2 Architectural Alignment	10
6.3 On the Run-Time Semantics of UML	11
6.3.1 The Basic Premises	11
6.3.2 The Semantics Architecture	11
6.3.3 The Basic Causality Model	12
6.3.4 Semantics Descriptions in the Specification	13
6.4 The UML Metamodel	13
6.4.1 Models and What They Model	13
6.4.2 Semantic Levels and Naming	14
6.5 How to Read this Specification	15
6.5.1 Specification format	15
6.5.2 Diagram format	18
6.6 Acknowledgements	19
Part I - Structure	21
7. Classes	23
7.1 Overview	23
7.2 Abstract Syntax	24
7.3 Class Descriptions	38
7.3.1 Abstraction (from Dependencies)	38
7.3.2 AggregationKind (from Kernel)	38
7.3.3 Association (from Kernel)	39
7.3.4 AssociationClass (from AssociationClasses)	47
7.3.5 BehavioralFeature (from Kernel)	48
7.3.6 BehaviorClassifier (from Interfaces)	49
7.3.7 Class (from Kernel)	49
7.3.8 Classifier (from Kernel, Dependencies, PowerTypes)	52
7.3.9 Comment (from Kernel)	57
7.3.10 Constraint (from Kernel)	58
7.3.11 DataType (from Kernel)	60
7.3.12 Dependency (from Dependencies)	62
7.3.13 DirectedRelationship (from Kernel)	63
7.3.14 Element (from Kernel)	64
7.3.15 ElementImport (from Kernel)	65
7.3.16 Enumeration (from Kernel)	67
7.3.17 EnumerationLiteral (from Kernel)	68
7.3.18 Expression (from Kernel)	69
7.3.19 Feature (from Kernel)	70
7.3.20 Generalization (from Kernel, PowerTypes)	71
7.3.21 GeneralizationSet (from PowerTypes)	75
7.3.22 InstanceSpecification (from Kernel)	82
7.3.23 InstanceValue (from Kernel)	85
7.3.24 Interface (from Interfaces)	86
7.3.25 InterfaceRealization (from Interfaces)	89
7.3.26 LiteralBoolean (from Kernel)	89
7.3.27 LiteralInteger (from Kernel)	90
7.3.28 LiteralNull (from Kernel)	91
7.3.29 LiteralSpecification (from Kernel)	92
7.3.30 LiteralString (from Kernel)	92
7.3.31 LiteralUnlimitedNatural (from Kernel)	93
7.3.32 MultiplicityElement (from Kernel)	94
7.3.33 NamedElement (from Kernel, Dependencies)	97
7.3.34 Namespace (from Kernel)	99
7.3.35 OpaqueExpression (from Kernel)	101
7.3.36 Operation (from Kernel, Interfaces)	103
7.3.37 Package (from Kernel)	107
7.3.38 PackageableElement (from Kernel)	109
7.3.39 PackageImport (from Kernel)	110
7.3.40 PackageMerge (from Kernel)	111
7.3.41 Parameter (from Kernel, AssociationClasses)	120
7.3.42 ParameterDirectionKind (from Kernel)	122
7.3.43 PrimitiveType (from Kernel)	122
7.3.44 Property (from Kernel, AssociationClasses)	123
7.3.45 Realization (from Dependencies)	129
7.3.46 RedefinableElement (from Kernel)	130

UML Superstructure Specification, v2.1.2 ii

21/63

Reading the Standard

Table of Contents 1. Scope 2. Conformance 2.1 Language Units 2.2 Compliance Levels 2.3 Meaning and Types 2.4 Compliance Level C 3. Normative References 4. Terms and Definitions 5. Symbols 6. Additional Information 6.1 Changes to Adopted 6.2 Architectural Alignme 6.3 On the Run-Time Se 6.3.1 The Basic Premis 6.3.2 The Semantics A 6.3.3 The Basic Causal 6.3.4 Semantics Descr 6.4 The UML Metamodel 6.4.1 Models and What 6.4.2 Semantic Levels 6.5 How to Read this Sp 6.5.1 Specification form 6.5.2 Diagram format ... 6.6 Acknowledgements Part I - Structure 7. Classes	7.1 Overview 7.2 Abstract Syntax 7.3 Class Descriptions 7.3.1 Abstraction (from 7.3.2 AggregationKind 7.3.3 Association (from 7.3.4 AssociationClass 7.3.5 BehavioralFeatur 7.3.6 BehavoredClass 7.3.7 Class (from Kerne 7.3.8 Classifier (from K 7.3.9 Comment (from K 7.3.10 Constraint (from 7.3.11 DataType (from 7.3.12 Dependency (fro 7.3.13 DirectedRelatio 7.3.14 Element (from K 7.3.15 ElementImport (f 7.3.16 Enumeration (fr 7.3.17 EnumerationLite 7.3.18 Expression (from 7.3.19 Feature (from K 7.3.20 Generalization (f 7.3.21 GeneralizationS 7.3.22 InstanceSpecific 7.3.23 InstanceValue (f 7.3.24 Interface (from I 7.3.25 InterfaceRealiza 7.3.26 LiteralBoolean (fr 7.3.27 LiteralInteger (fr 7.3.28 LiteralNull (from 7.3.29 LiteralSpecifia 7.3.30 LiteralString (fro 7.3.31 LiteralUnlimitedI 7.3.32 MultiplicityElem 7.3.33 NamedElement 7.3.34 Namespace (fro 7.3.35 OpaqueExpress 7.3.36 Operation (from 7.3.37 Package (from K 7.3.38 PackageableEle 7.3.39 PackageImport 7.3.40 PackageMerge (f 7.3.41 Parameter (from 7.3.42 ParameterDirec 7.3.43 PrimitiveType (f 7.3.44 Property (from K 7.3.45 Realization (from 7.3.46 RedefinableEle	7.3.47 Relationship (from Kernel) 7.3.48 Slot (from Kernel) 7.3.49 StructuralFeature (from Kernel) 7.3.50 Substitution (from Dependencies) 7.3.51 Type (from Kernel) 7.3.52 TypedElement (from Kernel) 7.3.53 Usage (from Dependencies) 7.3.54 ValueSpecification (from Kernel) 7.3.55 VisibilityKind (from Kernel) 8. Diagrams 8. Components 8.1 Overview 8.2 Abstract syntax 8.3 Class Descriptions 8.3.1 Component (from BasicComponents, PackagingComponents) 8.3.2 Connector (from BasicComponents) 8.3.3 ConnectorKind (from BasicComponents) 8.3.4 ComponentRealization (from BasicComponents) 8.4 Diagrams 9. Composite Structures 9.1 Overview 9.2 Abstract syntax 9.3 Class Descriptions 9.3.1 Class (from StructuredClasses) 9.3.2 Classifier (from Collaborations) 9.3.3 Collaboration (from Collaborations) 9.3.4 CollaborationUse (from Collaborations) 9.3.5 ConnectableElement (from InternalStructures) 9.3.6 Connector (from InternalStructures) 9.3.7 ConnectorEnd (from InternalStructures, Ports) 9.3.8 EncapsulatedClassifier (from Ports) 9.3.9 InvocationAction (from InvocationActions) 9.3.10 Parameter (from Collaborations) 9.3.11 Port (from Ports) 9.3.12 Property (from InternalStructures) 9.3.13 StructureClassifier (from InternalStructures) 9.3.14 Trigger (from InvocationActions) 9.3.15 Variable (from StructuredActivities) 9.4 Diagrams 10. Deployments
	UML Superstructure Specification, v2.1.2 ii	UML Superstructure Specification, v2.1.2 iii

- 22 - 2015-02-10 - Reading -

Reading the Standard Cont'd

```

classDiagram
    class Window {
        public size: Area = (100, 100)
        defaultSize: Rectangle
        protected visibility: Boolean = true
        private xWin: XWindow
        public display()
        public hide()
        private attachX(xWin: XWindow)
    }
  
```

Figure 7.29 - Class notation: attributes and operations grouped according to visibility

7.3.8 Classifier (from Kernel, Dependencies, PowerTypes)

A classifier is a classification of instances, it describes a set of instances that have features in common.

Generalizations

- "Namespace (from Kernel)" on page 99
- "RedefinableElement (from Kernel)" on page 130
- "Type (from Kernel)" on page 135

Description

A classifier is a namespace whose members can include features. Classifier is an abstract metaclass.

A classifier is a type and can own generalizations, thereby making it possible to define generalization relationships to other classifiers. A classifier can specify a generalization hierarchy by referencing its general classifiers.

A classifier is a redefinable element, meaning that it is possible to redefine nested classifiers.

Attributes

- `isAbstract`: Boolean
 If *true*, the Classifier does not provide a complete declaration and can typically not be instantiated. An abstract classifier is intended to be used by other classifiers (e.g., as the target of general metarelationshps or generalization relationships). Default value is *false*.

Associations

- `/attribute`: Property [*]
 Refers to all of the Properties that are direct (i.e., not inherited or imported) attributes of the classifier. Subsets *Classifier:feature* and is a derived union.
- `/feature`: Feature [*]
 Specifies each feature defined in the classifier. Subsets *Namespace:member*. This is a derived union.
- `/general`: Classifier[*]
 Specifies the general Classifiers for this Classifier. This is derived.

52 UML Superstructure Specification, v2.1.2

- 22 - 2015-02-10 - Reading -

Reading the Standard Cont'd

- 22 - 2015-02-10 - Reading -

```

public
size: Area = (
default:Size: R
protected
visibility: Bool
private
xWin: XWin
public
display()
hide()
private
attach(XWin:

```

Figure 7.29 - Class

7.3.8 Class

A classifier is a

Generalization

- "Name" : Name
- "Redefin" : Redefin
- "Type" : Type

Description

A classifier is a

A classifier is a

A classifier is a

Attributes

- isAbstract: Boolean
- If true, classifier relation

Associations

- / attribute : P Refers Classifier
- / feature : F Specific
- / general : C Specific

52

- generalization: Generalization[*] Specifies the Generalization relationships for this Classifier. These Generalizations navigate to more general classifiers in the generalization hierarchy. Subsets *Element::ownedElement*
- / inheritedMember: NamedElement[*] Specifies all elements inherited by this classifier from the general classifiers. Subsets *Namespace::member*. This is derived.
- redefinedClassifier: Classifier [*] References the Classifiers that are redefined by this Classifier. Subsets *RedefinableElement::redefinedElement*

Package Dependencies

- substitution: Substitution References the substitutions that are owned by this Classifier. Subsets *Element::ownedElement* and *NamedElement::clientDependency*.

Package PowerTypes

- powertypeExtent: GeneralizationSet Designates the GeneralizationSet of which the associated Classifier is a power type.

Constraints

- [1] The general classifiers are the classifiers referenced by the generalization relationships. `general = self.parents()`
- [2] Generalization hierarchies must be directed and acyclical. A classifier cannot be both a transitively general and transitively specific classifier of the same classifier. `not self.allParents()->includes(self)`
- [3] A classifier may only specialize classifiers of a valid type. `self.parents()->forall(c | self.maySpecializeType(c))`
- [4] The inheritedMember association is derived by inheriting the inheritable members of the parents. `self.inheritedMember->includesAll(self.inherit(self.parents()->collect(p | p.inheritableMembers(self)))`

Package PowerTypes

- [5] The Classifier that maps to a GeneralizationSet may neither be a specific nor a general Classifier in any of the Generalization relationships defined for that GeneralizationSet. In other words, a power type may not be an instance of itself nor may its instances also be its subclasses.

Additional Operations

- [1] The query `allFeatures()` gives all of the features in the namespace of the classifier. In general, through mechanisms such as inheritance, this will be a larger set than feature. `Classifier::allFeatures(): Set(Feature); allFeatures = member->select(ocl::KindOf(Feature))`
- [2] The query `parents()` gives all of the immediate ancestors of a generalized Classifier. `Classifier::parents(): Set(Classifier); parents = generalization,general`

53

UML Superstructure Specification, v2.1.2

22/63

Reading the Standard Cont'd

- 22 - 2015-02-10 - Reading -

```

public
size: Area = (
default:Size: R
protected
visibility: Bool
private
xWin: XWin
public
display()
hide()
private
attach(XWin:

```

Figure 7.29 - Class

7.3.8 Class

A classifier is a

Generalization

- "Name" : Name
- "Redefin" : Redefin
- "Type" : Type

Description

A classifier is a

A classifier is a

A classifier is a

Attributes

- isAbstract: Boolean
- If true, classifier relation

Associations

- / attribute : P Refers Classifier
- / feature : F Specific
- / general : C Specific

52

- generalization: Generalization[*] Specifies the Generalization relationships for this Classifier. These Generalizations navigate to more general classifiers in the generalization hierarchy. Subsets *Element::ownedElement*
- / inheritedMember: NamedElement[*] Specifies all elements inherited by this classifier from the general classifiers. Subsets *Namespace::member*. This is derived.
- redefinedClassifier: Classifier [*] References the Classifiers that are redefined by this Classifier. Subsets *RedefinableElement::redefinedElement*

Package Dependencies

- substitution: Substitution References the substitutions that are owned by this Classifier. Subsets *Element::ownedElement* and *NamedElement::clientDependency*.

Package PowerTypes

- powertypeExtent: GeneralizationSet Designates the GeneralizationSet of which the associated Classifier is a power type.

Constraints

- [1] The general classifiers are the classifiers referenced by the generalization relationships. `general = self.parents()`
- [2] Generalization hierarchies must be directed and acyclical. A classifier cannot be both a transitively general and transitively specific classifier of the same classifier. `not self.allParents()->includes(self)`
- [3] A classifier may only specialize classifiers of a valid type. `self.parents()->forall(c | self.maySpecializeType(c))`
- [4] The inheritedMember association is derived by inheriting the inheritable members of the parents. `self.inheritedMember->includesAll(self.inherit(self.parents()->collect(p | p.inheritableMembers(self)))`

Package PowerTypes

- [5] The Classifier that maps to a GeneralizationSet may neither be a specific nor a general Classifier in any of the Generalization relationships defined for that GeneralizationSet. In other words, a power type may not be an instance of itself nor may its instances also be its subclasses.

Additional Operations

- [3] The query `allParents()` gives all of the direct and indirect ancestors of a generalized Classifier. `Classifier::allParents(): Set(Classifier); allParents = self.parents()->union(self.parents()->collect(p | p.allParents()))`
- [4] The query `inheritableMembers()` gives all of the members of a classifier that may be inherited in one of its descendants, subject to whatever visibility restrictions apply. `Classifier::inheritableMembers(c: Classifier): Set(NamedElement); pre: c.allParents()->includes(self); inheritableMembers = member->select(m | c.hasVisibilityOf(m))`
- [5] The query `hasVisibilityOf()` determines whether a named element is visible in the classifier. By default all are visible. It is only called when the argument is something owned by a parent. `Classifier::hasVisibilityOf(n: NamedElement): Boolean; pre: self.allParents()->collect(c | c.member)->includes(n); if (self.inheritedMember->includes(n)) then hasVisibilityOf = (n.visibility <- #private) else hasVisibilityOf = true`
- [6] The query `conformsTo()` gives true for a classifier that defines a type that conforms to another. This is used, for example, in the specification of signature conformance for operations. `Classifier::conformsTo(other: Classifier): Boolean; conformsTo = (self==other) or (self.allParents()->includes(other))`
- [7] The query `inherit()` defines how to inherit a set of elements. Here the operation is defined to inherit them all. It is intended to be redefined in circumstances where inheritance is affected by redefinition. `Classifier::inherit(inh: Set(NamedElement)): Set(NamedElement); inherit = inh`
- [8] The query `maySpecializeType()` determines whether this classifier may have a generalization relationship to classifiers of the specified type. By default a classifier may specialize classifiers of the same or a more general type. It is intended to be redefined by classifiers that have different specialization constraints. `Classifier::maySpecializeType(c: Classifier): Boolean; maySpecializeType = self.ocl::KindOf(c.oclType)`

Semantics

A classifier is a classification of instances according to their features.

A Classifier may participate in generalization relationships with other Classifiers. An instance of a specific Classifier is also an (indirect) instance of each of the general Classifiers. Therefore, features specified for instances of the general classifier are implicitly specified for instances of the specific classifier. Any constraint applying to instances of the general classifier also applies to instances of the specific classifier.

The specific semantics of how generalization affects each concrete subtype of Classifier varies. All instances of a classifier have values corresponding to the classifier's attributes.

A Classifier defines a type. Type conformance between generalizable Classifiers is defined so that a Classifier conforms to itself and to all of its ancestors in the generalization hierarchy.

54

UML Superstructure Specification, v2.1.2

22/63

Reading the Standard Cont'd

Figure 7.29 - Class

```

classDiagram
    class Window {
        +public size: Area = f
        +data: Size: R
        +protected visibility: Boolean
        +private xWin, xWinEnd
        +public display()
        +hide()
        +private attach(xWin)
    }
        
```

Package PowerTypes

The notion of power type was inspired by the notion of power set. A power set is defined as a set whose instances are subsets. In essence, then, a power type is a class whose instances are subclasses. The powertypeExtent association relates a Classifier with a set of generalizations that a) have a common specific Classifier, and b) represent a collection of subsets for that class.

Semantic Variation Points

The precise lifecycle semantics of aggregation is a semantic variation point.

Notation

Classifier is an abstract model element, and so properly speaking has no notation. It is nevertheless convenient to define in one place a default notation available for any concrete subclass of Classifier for which this notation is suitable. The default notation for a classifier is a solid-outline rectangle containing the classifier's name, and optionally with compartments separated by horizontal lines containing features or other members of the classifier. The specific type of classifier can be shown in guillemets above the name. Some specializations of Classifier have their own distinct notations.

The name of an abstract Classifier is shown in italics.

An attribute can be shown as a text string. The format of this string is specified in the Notation sub clause of "Property (from Kernel, AssociationClasses)" on page 123.

Presentation Options

Any compartment may be suppressed. A separator line is not drawn for a suppressed compartment. If a compartment is suppressed, no inference can be drawn about the presence or absence of elements in it. Compartment names can be used to remove ambiguity, if necessary.

An abstract Classifier can be shown using the keyword [abstract] after or below the name of the Classifier.

The type, visibility, default, multiplicity, property string may be suppressed from being displayed, even if there are values in the model.

The individual properties of an attribute can be shown in columns rather than as a continuous string.

Style Guidelines

- Attribute names typically begin with a lowercase letter. Multi-word names are often formed by concatenating the words and using lowercase for all letters except for upcasing the first letter of each word but the first.
- Center the name of the classifier in boldface.
- Center keyword (including stereotype names) in plain face within guillemets above the classifier name.
- For those languages that distinguish between uppercase and lowercase characters, capitalize names (i.e. begin them with an uppercase character).
- Left justify attributes and operations in plain face.
- Begin attribute and operation names with a lowercase letter.
- Show full attributes and operations when needed and suppress them in other contexts or references.

22 - 2015-02-10 - Reading -

Reading the Standard

Figure 7.29 - Class

```

classDiagram
    class Window {
        +public size: Area = f
        +data: Size: R
        +protected visibility: Boolean
        +private xWin, xWinEnd
        +public display()
        +hide()
        +private attach(xWin)
    }
        
```

Package PowerTypes

The notion of power type was inspired by the notion of power set. A power set is defined as a set whose instances are subsets. In essence, then, a power type is a class whose instances are subclasses. The powertypeExtent association relates a Classifier with a set of generalizations that a) have a common specific Classifier, and b) represent a collection of subsets for that class.

Semantic Variation Points

The precise lifecycle semantics of aggregation is a semantic variation point.

Notation

Classifier is an abstract model element, and so properly speaking has no notation. It is nevertheless convenient to define in one place a default notation available for any concrete subclass of Classifier for which this notation is suitable. The default notation for a classifier is a solid-outline rectangle containing the classifier's name, and optionally with compartments separated by horizontal lines containing features or other members of the classifier. The specific type of classifier can be shown in guillemets above the name. Some specializations of Classifier have their own distinct notations.

The name of an abstract Classifier is shown in italics.

An attribute can be shown as a text string. The format of this string is specified in the Notation sub clause of "Property (from Kernel, AssociationClasses)" on page 123.

Presentation Options

Any compartment may be suppressed. A separator line is not drawn for a suppressed compartment. If a compartment is suppressed, no inference can be drawn about the presence or absence of elements in it. Compartment names can be used to remove ambiguity, if necessary.

An abstract Classifier can be shown using the keyword [abstract] after or below the name of the Classifier.

The type, visibility, default, multiplicity, property string may be suppressed from being displayed, even if there are values in the model.

The individual properties of an attribute can be shown in columns rather than as a continuous string.

Style Guidelines

- Attribute names typically begin with a lowercase letter. Multi-word names are often formed by concatenating the words and using lowercase for all letters except for upcasing the first letter of each word but the first.
- Center the name of the classifier in boldface.
- Center keyword (including stereotype names) in plain face within guillemets above the classifier name.
- For those languages that distinguish between uppercase and lowercase characters, capitalize names (i.e. begin them with an uppercase character).
- Left justify attributes and operations in plain face.
- Begin attribute and operation names with a lowercase letter.
- Show full attributes and operations when needed and suppress them in other contexts or references.

Examples

Figure 7.30 - Examples of attributes

The attributes in Figure 7.30 are explained below.

- ClassA: name is an attribute with type String.
- ClassA: shape is an attribute with type Rectangle.
- ClassA: size is a public attribute of type Integer with multiplicity 0..1.
- ClassA: area is a derived attribute with type Integer. It is marked as read-only.
- ClassA: height is an attribute of type Integer with a default initial value of 5.
- ClassA: width is an attribute of type Integer.
- ClassB: id is an attribute that redefines ClassA: name.
- ClassB: shape is an attribute that redefines ClassA: shape. It has type Square, a specialization of Rectangle.
- ClassB: height is an attribute that redefines ClassA: height. It has a default of 7 for ClassB instances that overrides the ClassA default of 5.
- ClassB: width is a derived attribute that redefines ClassA: width, which is not derived.

Figure 7.31 - Association-like notation for attribute

An attribute may also be shown using association notation, with no adornments at the tail of the arrow as shown in Figure 7.31.

22 - 2015-02-10 - Reading -

Open Questions...

- Now you've been **"tricked"** again. Twice.
 - We didn't tell what the **modelling language** for meta-modelling is.
 - We didn't tell what the **is-instance-of** relation of this language is.
- **Idea**: have a **minimal object-oriented core** comprising the notions of **class**, **association**, **inheritance**, **etc.** with "self-explaining" semantics.
- This is **Meta Object Facility** (MOF), which (more or less) coincides with UML Infrastructure [OMG, 2007a].
- So: things on meta level
 - M0 are object diagrams/system states
 - M1 are **words of the language UML**
 - M2 are **words of the language MOF**
 - M3 are **words of the language ...**

– 22 – 2015-02-10 – Smof –

24/63

MOF Semantics

- One approach:
 - Treat it with **our signature-based theory**
 - This is (in effect) the right direction, but may require new (or extended) signatures for each level.
(For instance, MOF doesn't have a notion of Signal, our signature has.)
- Other approach:
 - Define a **generic, graph based** "is-instance-of" relation.
 - Object diagrams (that **are** graphs) then **are** the system states — not **only graphical representations** of system states.
 - If this works out, good: We can easily experiment with different language designs, e.g. different flavours of UML that immediately have a semantics.
 - Most interesting: also do generic definition of behaviour within a closed modelling setting, but this is clearly still research, e.g. [Buschermöhle and Oelerink, 2008].

– 22 – 2015-02-10 – Smof –

25/63

Meta-Modelling: (Anticipated) Benefits

Benefits: Overview

- We'll (superficially) look at three aspects:
 - Benefits for **Modelling Tools**.
 - Benefits for **Language Design**.
 - Benefits for **Code Generation and MDA**.

Benefits for Modelling Tools

- The meta-model \mathcal{M}_U of UML **immediately** provides a **data-structure** representation for the abstract syntax (\sim for our signatures).

If we have code generation for UML models, e.g. into Java, then we can immediately represent UML models **in memory** for Java.

(Because each MOF model is in particular a UML model.)

- There exist tools and libraries called **MOF-repositories**, which can generically represent instances of MOF instances (in particular UML models).

And which can often generate specific code to manipulate instances of MOF instances in terms of the MOF instance.

Benefits for Modelling Tools Cont'd

- And not only **in memory**, if we can represent MOF instances in files, we obtain a canonical representation of UML models **in files**, e.g. in XML.
→ XML Metadata Interchange (XMI)
- **Note:** A priori, there is no graphical information in XMI (it is only abstract syntax like our signatures) → OMG Diagram Interchange.

- **Note:** There are slight ambiguities in the XMI standard.

And different tools by different vendors often seem to lie at opposite ends on the scale of interpretation. Which is surely a coincidence.

In some cases, it's possible to fix things with, e.g., XSLT scripts, but full vendor independence is today not given.

Plus XMI compatibility doesn't necessarily refer to Diagram Interchange.

- **To re-iterate:** this is **generic for all** MOF-based modelling languages such as UML, CWM, etc.
And also for **Domain Specific Languages** which don't even exist yet.

Benefits: Overview

- We'll (superficially) look at three aspects:
 - Benefits for **Modelling Tools**. ✓
 - Benefits for **Language Design**.
 - Benefits for **Code Generation and MDA**.

Benefits for Language Design

- Recall: we said that code-generators are possible “readers” of stereotypes.
- For example, (heavily simplifying) we could
 - introduce the stereotypes **Button**, **Toolbar**, ...
 - for convenience, instruct the modelling tool to use special pictures for stereotypes — in the meta-data (the abstract syntax), the stereotypes are clearly present.
 - instruct the code-generator to automatically add inheritance from `Gtk::Button`, `Gtk::Toolbar`, etc. **corresponding** to the stereotype.

Et voilà: we can model Gtk-GUIs and generate code for them.

- Another view:
 - UML with these stereotypes **is a new modelling language**: Gtk-UML.
 - Which lives on the same meta-level as UML (M2).
 - It's a **Domain Specific Modelling Language** (DSL).

One mechanism to define DSLs (based on UML, and “within” UML): **Profiles**.

Benefits for Language Design Cont'd

- For each DSL defined by a Profile, we immediately have
 - in memory representations,
 - modelling tools,
 - file representations.
- **Note:** here, the **semantics** of the stereotypes (and thus the language of Gtk-UML) **lies in the code-generator**.

That's the first "reader" that understands these special stereotypes. (And that's what's meant in the standard when they're talking about giving stereotypes semantics).

- One can also impose additional well-formedness rules, for instance that certain components shall all implement a certain interface (and thus have certain methods available). (Cf. [Stahl and Völter, 2005].)

Benefits for Language Design Cont'd

- One step further:
 - Nobody hinders us to obtain a model of UML (written in MOF),
 - throw out parts unnecessary for our purposes,
 - add (= integrate into the existing hierarchy) more adequate new constructs, for instance, **contracts** or something more close to hardware as **interrupt** or **sensor** or **driver**,
 - and maybe also stereotypes.

→ a new language standing next to UML, CWM, etc.

- Drawback: the resulting language is not necessarily UML any more, so we **can't use** proven UML modelling tools.
- But we can use all tools for MOF (or MOF-like things).
For instance, Eclipse EMF/GMF/GEF.

Benefits: Overview

- We'll (superficially) look at three aspects:
 - Benefits for **Modelling Tools**. ✓
 - Benefits for **Language Design**. ✓
 - Benefits for **Code Generation and MDA**.

Benefits for Model (to Model) Transformation

- There are manifold applications for model-to-model transformations:
 - For instance, tool support for **re-factorings**, like moving common attributes upwards the inheritance hierarchy.

This can now be defined as **graph-rewriting** rules on the level of MOF.
The graph to be rewritten is the UML model
 - Similarly, one could transform a **Gtk-UML** model into a **UML model**, where the inheritance from classes like `Gtk::Button` is made explicit.

The transformation would add this class `Gtk::Button` and the inheritance relation and remove the stereotype.
 - Similarly, one could have a **GUI-UML** model transformed into a **Gtk-UML** model, or a Qt-UML model.

The former a PIM (Platform Independent Model), the latter a PSM (Platform Specific Model) — cf. MDA.

Special Case: Code Generation

- Recall that we said that, e.g. Java code, can also be seen as a model. So code-generation is a **special case** of model-to-model transformation; only the destination looks quite different.
- Note:** Code generation needn't be as expensive as buying a modelling tool with full fledged code generation.
- If we have the UML model (or the DSL model) given as an XML file, code generation can be **as simple as** an XSLT script.

"Can be" in the sense of

"There may be situation where a graphical and abstract representation of something is desired which has a clear and direct mapping to some textual representation."

In general, code generation can (in colloquial terms) become **arbitrarily difficult**.

Example: Model and XMI




```
<?xml version = '1.0' encoding = 'UTF-8' ?>
<XMI xmi.version = '1.2' xmlns:UML = 'org.omg.xmi.namespace.UML' timestamp = 'Mon Feb 02 18:23:12 CET 2009'>
  <XMI.content>
    <UML:Model xmi.id = '...'>
      <UML:Namespace.ownedElement>
        <UML:Class xmi.id = '...' name = 'SensorA'>
          <UML:ModelElement.stereotype>
            <UML:Stereotype name = 'pt100' />
          </UML:ModelElement.stereotype>
        </UML:Class>
        <UML:Class xmi.id = '...' name = 'ControllerA'>
          <UML:ModelElement.stereotype>
            <UML:Stereotype name = '65C02' />
          </UML:ModelElement.stereotype>
        </UML:Class>
        <UML:Class xmi.id = '...' name = 'UsbA'>
          <UML:ModelElement.stereotype>
            <UML:Stereotype name = 'NET2270' />
          </UML:ModelElement.stereotype>
        </UML:Class>
        <UML:Association xmi.id = '...' name = 'in' >...</UML:Association>
        <UML:Association xmi.id = '...' name = 'out' >...</UML:Association>
      </UML:Namespace.ownedElement>
    </UML:Model>
  </XMI.content>
</XMI>
```

Wrapup & Questions

Content

- Lecture 1: Motivation and Overview
- Lecture 2: Semantical Model
- Lecture 3: Object Constraint Language (OCL)
- Lecture 4: OCL Semantics
- Lecture 5: Object Diagrams
- Lecture 6: Class Diagrams I
- Lecture 7: Type Systems and Visibility
- Lecture 8: Class Diagrams II
- Lecture 9: Class Diagrams III
- Lecture 10: Constructive Behaviour, State Machines Overview
- Lecture 11: Core State Machines I
- Lecture 12: Core State Machines II
- Lecture 13: Core State Machines III
- Lecture 14: Core State Machines IV
- Lecture 15: Core State Machines V, Rhapsody
- Lecture 16: Hierarchical State Machines I
- Lecture 17: Hierarchical State Machines II
- Lecture 18: Live Sequence Charts I
- Lecture 19: Live Sequence Charts II
- Lecture 20: Inheritance I
- Lecture 21: Meta-Modelling, Inheritance II
- Lecture 22: Wrapup & Questions

Course Path: Over Map

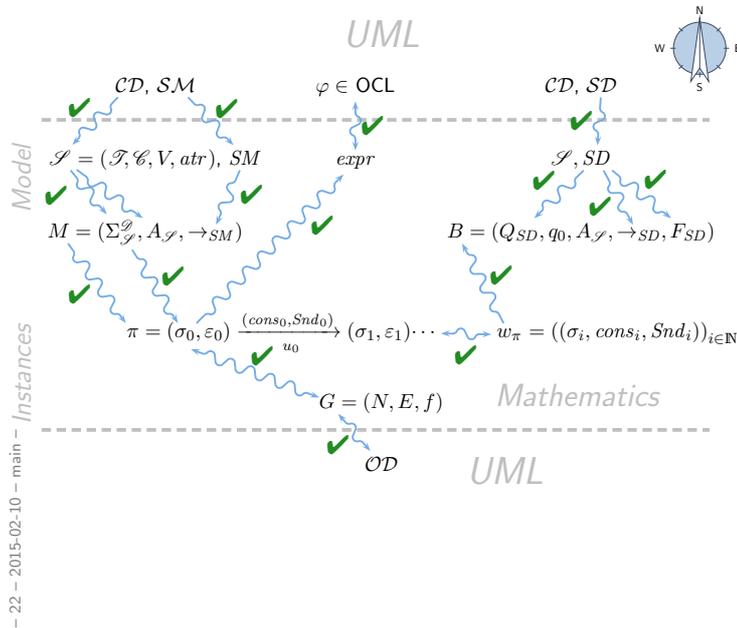

- Motivation
- Semantical Model
- OCL
- Object Diagrams
- Class Diagrams
- State Machines
- Live Sequence Charts
- ~~Real Time~~
- ~~Components~~
- Inheritance
- Meta-Modeling

40/63

Wrapup: Motivation

- **Lecture 1: Motivation and Overview**
- Lecture 2: Semantical Model
- Lecture 3: Object Constraint Language (OCL)
- Lecture 4: OCL Semantics
- Lecture 5: Object Diagrams
- Lecture 6: Class Diagrams I
- Lecture 7: Type Systems and Visibility
- Lecture 8: Class Diagrams II
- Lecture 9: Class Diagrams III
- Lecture 10: Constructive Behaviour, State Machines Overview
- Lecture 11: Core State Machines I
- Lecture 12: Core State Machines II
- Lecture 13: Core State Machines III
- Lecture 14: Core State Machines IV
- Lecture 15: Core State Machines V, Rhapsody
- Lecture 16: Hierarchical State Machines I
- Lecture 17: Hierarchical State Machines II
- Lecture 18: Live Sequence Charts I
- Lecture 19: Live Sequence Charts II
- Lecture 20: Inheritance I
- Lecture 21: Meta-Modelling, Inheritance II
- Lecture 22: Wrapup & Questions

- 22 - 2015-02-10 - main -

41/63

Wrapup: Motivation

Lecture 1:

- **Educational Objectives:** you should
 - be able to explain the term **model**.
 - know the idea (and hopes and promises) of **model-driven** SW development.
 - be able to explain how **UML** fits into this general picture.
 - know **what** we'll do we've done in the course, and **why**.
 - thus be able to decide whether you want to stay with us...
- How can UML help with software development?
- Where is which sublanguage of UML useful?
- For what purpose? With what drawbacks?

Wrapup: Examining Motivation

- what is a model? for example?
- “a model is an image or a pre-image” — of what? please explain!
- when is a model a good model?
- what is model-based software engineering?
 - MDA? MDSE?
 - what do people hope to gain from MBSE? Why? Hope Justified?
 - what are the fundamental pre-requisites for that?
- what are purposes of modelling guidelines?
 - could you illustrate this with examples?
 - how can we establish/enforce them? can tools or procedures help?
- what's the qualitative difference between the modelling guideline “all association ends have a multiplicity” and “all state-machines are deterministic”?
- ...

Wrapup: Examining Motivation

- what is UML (definitely)? why?
- what is it (definitely) not? why?
- how does UML relate to programming languages?
- what are the intentions of UML?
- what is the history of UML? Why could it be useful to know that?

- where can (what part of) UML be used in MBSE?
 - for what purpose? to improve what?
- we discussed a notion of “UML mode” by M. Fowler.
 - what is that? why is it useful to think about it?

Wrapup: Examining “The Big Picture”

- what kinds of diagrams does UML offer?
- what is the purpose of the X diagram?
- what do the diagrams X and Y have in common?

- what is a UML model (our definition)? what does it mean?

- what is the difference between well-formedness rules and modelling guidelines?

- what is meta-modelling?
 - could you explain it on the example of UML?

- what is a class diagram in the context of meta-modelling?
- what benefits do people see in meta-modelling?
- the standard is split into the two documents “Infrastructure” and “Superstructure”. what is the rationale behind that?
- in what modelling language is UML modelled?

Wrapup: Modelling Structure

- Lecture 1: Motivation and Overview
- **Lecture 2: Semantical Model**
- **Lecture 3: Object Constraint Language (OCL)**
- **Lecture 4: OCL Semantics**
- **Lecture 5: Object Diagrams**
- **Lecture 6: Class Diagrams I**
- **Lecture 7: Type Systems and Visibility**
- **Lecture 8: Class Diagrams II**
- **Lecture 9: Class Diagrams III**
- Lecture 10: Constructive Behaviour, State Machines Overview
- Lecture 11: Core State Machines I
- Lecture 12: Core State Machines II
- Lecture 13: Core State Machines III
- Lecture 14: Core State Machines IV
- Lecture 15: Core State Machines V, Rhapsody
- Lecture 16: Hierarchical State Machines I
- Lecture 17: Hierarchical State Machines II
- Lecture 18: Live Sequence Charts I
- Lecture 19: Live Sequence Charts II
- Lecture 20: Inheritance I
- Lecture 21: Meta-Modelling, Inheritance II
- Lecture 22: Wrapup & Questions

– 22 – 2015-02-10 – main –

46/63

Wrapup: Modelling Structure

Lecture 2:

- **Educational Objectives:** Capabilities for these tasks/questions:
 - Why is UML of the form it is?
 - Shall one feel bad if not using all diagrams during software development?
 - What is a signature, an object, a system state, etc.?
What's the purpose in the course?
 - How do Basic Object System Signatures relate to UML class diagrams?

Lecture 3 & 4:

- **Educational Objectives:** Capabilities for these tasks/questions:
 - Please explain/read out this OCL constraint. Is it well-typed?
 - Please formalise this constraint in OCL.
 - Does this OCL constraint hold in this (complete) system state?
 - Can you think of a system state satisfying this constraint?
 - Please un-abbreviate all abbreviations in this OCL expression.
 - In what sense is OCL a three-valued logic? For what purpose?
 - How are $\mathcal{Q}(C)$ and τ_C related?

– 22 – 2015-02-10 – main –

47/63

Wrapup: Modelling Structure

Lecture 5:

- **Educational Objectives:** Capabilities for following tasks/questions.
 - What is an object diagram? What are object diagrams good for?
 - When is an object diagram called partial? What are partial ones good for?
 - How are system states and object diagrams related?
 - What does it mean that an OCL expression is satisfiable?
 - When is a set of OCL constraints said to be consistent?
 - Can you think of an object diagram which violates this OCL constraint?
 - Is this UML model \mathcal{M} consistent wrt. $Inv(\mathcal{M})$?

Lecture 6:

- **Educational Objectives:** Capabilities for following tasks/questions.
 - What is a class diagram?
 - For what purposes are class diagrams useful?
 - Could you please map this class diagram to a signature?
 - Could you please map this signature to a class diagram?

– 22 – 2015-02-10 – main –

48/63

Wrapup: Modelling Structure

Lecture 7:

- **Educational Objectives:** Capabilities for following tasks/questions.
 - Is this OCL expression well-typed or not? Why?
 - How/in what form did we define well-definedness?
 - What is visibility good for? Where is it used?

Lecture 8 & 9:

- **Educational Objectives:** Capabilities for following tasks/questions.
 - Please explain/illustrate this class diagram with associations.
 - Which annotations of an association arrow are (semantically) relevant? In what sense? For what?
 - What's a role name? What's it good for?
 - What's "multiplicity"? How did we treat them semantically?
 - What is "reading direction", "navigability", "ownership", ...?
 - What's the difference between "aggregation" and "composition"?

– 22 – 2015-02-10 – main –

49/63

Wrapup: Modelling Structure

Lecture 9:

- **Educational Objectives:** Capabilities for following tasks/questions.
 - What are purposes of modelling guidelines? (Example?)
 - When is a class diagram a good class diagram?
 - Discuss the style of this class diagram.

Lecture 20 & 21:

- **Educational Objectives:** Capabilities for following tasks/questions.
 - What's the effect of inheritance on System States?
 - What does the Liskov Substitution Principle mean regarding structure?
 - What is the subset, what the uplink semantics of inheritance?
 - What's the idea of Meta-Modelling?

Wrapup: Modelling Behaviour, Constructive

- Lecture 1: Motivation and Overview
- Lecture 2: Semantical Model
- Lecture 3: Object Constraint Language (OCL)
- Lecture 4: OCL Semantics
- Lecture 5: Object Diagrams
- Lecture 6: Class Diagrams I
- Lecture 7: Type Systems and Visibility
- Lecture 8: Class Diagrams II
- Lecture 9: Class Diagrams III
- **Lecture 10: Constructive Behaviour, State Machines Overview**
- **Lecture 11: Core State Machines I**
- **Lecture 12: Core State Machines II**
- **Lecture 13: Core State Machines III**
- **Lecture 14: Core State Machines IV**
- **Lecture 15: Core State Machines V, Rhapsody**
- **Lecture 16: Hierarchical State Machines I**
- **Lecture 17: Hierarchical State Machines II**
- Lecture 18: Live Sequence Charts I
- Lecture 19: Live Sequence Charts II
- Lecture 20: Inheritance I
- Lecture 21: Meta-Modelling, Inheritance II
- Lecture 22: Wrapup & Questions

Wrapup: Modelling Behaviour, Constructive

Main and General:

- **Educational Objectives:** Capabilities for following tasks/questions.
 - What does this State Machine mean?
 - What happens if I inject this event?
 - Can you please model the following behaviour.
(And **convince** readers that your model is correct.)

Wrapup: Modelling Behaviour, Constructive

Lecture 10:

- **Educational Objectives:** Capabilities for following tasks/questions.
 - What's the difference between reflective and constructive descriptions of behaviour?
 - What's the Basic Causality Model?
 - What does the standard say about the dispatching method?
 - What is (intuitively) a run-to-completion step?

Lecture 11:

- **Educational Objectives:** Capabilities for following tasks/questions.
 - Can you please model the following behaviour.
 - What is: trigger, guard, action?
 - Please unabbreviate this abbreviated transition annotation.
 - What is an ether? Example? Why did we introduce it?
 - What's the difference: signal, signal event, event, trigger, reception, consumption?
 - What's a system configuration?

Wrapup: Modelling Behaviour, Constructive

Lecture 12 & 13:

- **Educational Objectives:** Capabilities for following tasks/questions.
 - What is a transformer? Example? Why did we introduce it?
 - What is a re-use semantics? What of the framework would we change to go to a non-re-use semantics?
 - What labelled transition system is induced by a UML model?
 - What is: discard, dispatch, commence?
 - What's the meaning of stereotype "signal,env"?
 - Does environment interaction necessarily occur?
 - What happens on "division by 0"?

Lecture 14 & 15:

- **Educational Objectives:** Capabilities for following tasks/questions.
 - What is a step (definition)? Run-to-completion step (definition)? Microstep (intuition)?
 - Do objects always finally become stable?
 - In what sense is our RTC semantics not compositional?

54/63

– 22 – 2015-02-10 – main –

Wrapup: Modelling Behaviour, Constructive

Lecture 16:

- **Educational Objectives:** Capabilities for following tasks/questions.
 - What's a kind of a state? What's a pseudo-state?
 - What's a region? What's it good for?
 - What is: entry, exit, do, internal transition?
 - What's a completion event? What has it to do with the ether?

Lecture 17:

- **Educational Objectives:** Capabilities for following tasks/questions.
 - What's a state configuration?
 - When are two states orthogonal? When consistent?
 - What's the depth of a state? Why care?
 - What is the set of enabled transitions in this system configuration and this state machine?

55/63

– 22 – 2015-02-10 – main –

Wrapup: Modelling Behaviour, Constructive

Lecture 18:

- **Educational Objectives:** Capabilities for following tasks/questions.
 - What's a history state? Deep vs. shallow?
 - What is: junction, choice, terminate?
 - What is the idea of "deferred events"?
 - What is a passive object? Why are passive reactive objects special? What did we do in that case?
 - What's a behavioural feature? How can it be implemented?

Wrapup: Modelling Behaviour, Reflective

- Lecture 1: Motivation and Overview
- Lecture 2: Semantical Model
- Lecture 3: Object Constraint Language (OCL)
- Lecture 4: OCL Semantics
- Lecture 5: Object Diagrams
- Lecture 6: Class Diagrams I
- Lecture 7: Type Systems and Visibility
- Lecture 8: Class Diagrams II
- Lecture 9: Class Diagrams III
- Lecture 10: Constructive Behaviour, State Machines Overview
- Lecture 11: Core State Machines I
- Lecture 12: Core State Machines II
- Lecture 13: Core State Machines III
- Lecture 14: Core State Machines IV
- Lecture 15: Core State Machines V, Rhapsody
- Lecture 16: Hierarchical State Machines I
- Lecture 17: Hierarchical State Machines II
- **Lecture 18: Live Sequence Charts I**
- **Lecture 19: Live Sequence Charts II**
- Lecture 20: Inheritance I
- Lecture 21: Meta-Modelling, Inheritance II
- Lecture 22: Wrapup & Questions

Wrapup: Modelling Behaviour, Reflective

Lecture 18, & 19:

- **Educational Objectives:** Capabilities for following tasks/questions.
 - Is each LSC description of behaviour necessarily reflective?
 - There exists another distinction between “inter-object” and “intra-object” behaviour. Discuss in the context of UML.
 - What does this LSC mean?
 - Are this UML model’s state machines consistent with the interactions?
 - Please provide a UML model which is consistent with this LSC.
 - What is: activation (mode, condition), hot/cold condition, pre-chart, cut, hot/cold location, local invariant, legal exit, hot/cold chart etc.?

Wrapup: Inheritance

- Lecture 1: Motivation and Overview
- Lecture 2: Semantical Model
- Lecture 3: Object Constraint Language (OCL)
- Lecture 4: OCL Semantics
- Lecture 5: Object Diagrams
- Lecture 6: Class Diagrams I
- Lecture 7: Type Systems and Visibility
- Lecture 8: Class Diagrams II
- Lecture 9: Class Diagrams III
- Lecture 10: Constructive Behaviour, State Machines Overview
- Lecture 11: Core State Machines I
- Lecture 12: Core State Machines II
- Lecture 13: Core State Machines III
- Lecture 14: Core State Machines IV
- Lecture 15: Core State Machines V, Rhapsody
- Lecture 16: Hierarchical State Machines I
- Lecture 17: Hierarchical State Machines II
- Lecture 18: Live Sequence Charts I
- Lecture 19: Live Sequence Charts II
- **Lecture 20: Inheritance I**
- **Lecture 21: Meta-Modelling, Inheritance II**
- Lecture 22: Wrapup & Questions

Wrapup: Inheritance

Lecture 20 & 21:

- **Educational Objectives:** Capabilities for following tasks/questions.
 - What's the effect of inheritance on LSCs, State Machines, System States?
 - What's the Liskov Substitution Principle?
 - What is commonly understood under (behavioural) sub-typing?
 - What is the subset, what the uplink semantics of inheritance?
 - What is late/early binding?
 - What's the idea of Meta-Modelling?

Hmm...

- Open book or closed book...?

References

-
- [Buschermöhle and Oelerink, 2008] Buschermöhle, R. and Oelerink, J. (2008). Rich meta object facility. In Proc. 1st IEEE Int'l workshop UML and Formal Methods.
- [OMG, 2003] OMG (2003). Uml 2.0 proposal of the 2U group, version 0.2, <http://www.2uworks.org/uml2submission>.
- [OMG, 2007a] OMG (2007a). Unified modeling language: Infrastructure, version 2.1.2. Technical Report formal/07-11-04.
- [OMG, 2007b] OMG (2007b). Unified modeling language: Superstructure, version 2.1.2. Technical Report formal/07-11-02.
- [Stahl and Völter, 2005] Stahl, T. and Völter, M. (2005). Modellgetriebene Softwareentwicklung. dpunkt.verlag, Heidelberg.