

Softwaretechnik / Software-Engineering

Lecture 4: Software Project Management

2017-05-11

Prof. Dr. Andreas Podelski, **Dr. Bernd Westphal**

Albert-Ludwigs-Universität Freiburg, Germany

Topic Area Project Management: Content

VL 2

● Software Metrics

- Properties of Metrics
- Scales
- Examples

⋮

VL 3

● Cost Estimation

- “(Software) Economics in a Nutshell”
- Expert’s Estimation
- Algorithmic Estimation

⋮

VL 4

● Project Management

- Project
- Process and Process Modelling
- Procedure Models
- Process Models

⋮

VL 5

● Process Metrics

- CMMI, Spice

⋮

- **(Software) Project**

- **Project Management**

- Goals and Activities
- Common Activities
- Excursion: Risk

- **Software Project Planning**

- Costs and Deadlines
 - phase, milestone, deadline
- Tasks and Activities
- People and Roles
 - responsibilities and rights

- **Software Development Process**

- process vs. process model
- cycle, life cycle, software life cycle

- **Procedure and Process Models**

Project

Vocabulary: Project

project – A **temporary activity** that is characterized by **having**

- a **start date**,
- specific **objectives and constraints**,
- established **responsibilities**,
- a **budget and schedule**, and
- a **completion date**.

If the objective of the project is to develop a software system, then it is sometimes called a **software development project** or **software engineering project**.

R. H. Thayer (1997)

We could refine our earlier definition as follows: a project is **successful** if and only if

- **started** at start date,
- **achieved** objectives,
- **respected** constraints,
- **adheres** to budget and schedule,
- **stops** at completion date.

Whether, e.g., objectives have been achieved can still be **subjective** (→ customer/user happy).

Vocabulary: Software Project

(software) project – characteristics:

- **Duration** is limited.
- Has an **originator** (person or institution which initiated the project).
 - The **project owner** is the originator or its representative.
 - The **project leader** reports to the project owner.
- Has a **purpose**, i.e. pursue a bunch of goals.
 - The most important goal is usually to create or modify software; this software is thus the result of the project, the **product**.
Other important goals are extension of know-how, preparation of building blocks for later projects, or utilisation of employees.

The project is called **successful** if the goals are reached to a high degree.

- Has a **recipient** (or will have one).
 - This recipient is the **customer**.
 - Later **users** (conceptionally) belong to the customer.
- **Links people, results** (intermediate/final products), and **resources**.

The **organisation** determines roles of and relations between people/results/resources, and the **external interfaces** of the project.

Ludewig & Lichter (2013)



Developer



Customer



User

Project Management

Goals and Activities of Project Management

- **Main and general goal:**

A **successful** project, i.e. the project **delivers**


- defined **results**
- in demanded **quality**
- within scheduled **time**
- using the assigned **resources**.

There may be **secondary goals**, e.g.,

- build or strengthen good **reputation** on market,
- acquire **knowledge** which is useful for later projects,
- develop **re-usable components** (to save resources later),
- be attractive to **employees**.
- ...

- **Main project management activities** (and **responsibilities** of project manager):

- | | |
|---|---|
| <ul style="list-style-type: none">● Planning | <ul style="list-style-type: none">● Communication |
| <ul style="list-style-type: none">● Assessment and Control | <ul style="list-style-type: none">● Leading and Motivation of Employees |
| <ul style="list-style-type: none">● Recognising and Fighting Difficulties as Early as Possible | <ul style="list-style-type: none">● Creation and Preservation of Beneficial Conditions |

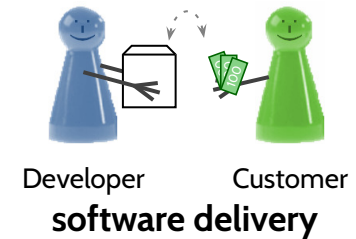

Activities of Project Management

Without plans, a project cannot be managed.
Note: mistakes in planning can be hard to resolve.

Work results and project progress have to be **assessed** and **compared to the plans**; it has to be observed whether participants stick to agreements.

- **Planning**
- **Assessment and Control**
- **Recognising and Fighting Difficulties as Early as Possible**

Unforeseen difficulties and problems in projects are not exceptional but usual.
Therefore, project management needs to constantly “screen the horizon for icebergs”, and, when spotting one, react timely and effectively.
In other words: **systematic risk management**.

Distribute information between project participants (project owner, customer, developers, administration).

- **Communication**
- **Leading and Motivation of Employees**
- **Creation and Preservation of Beneficial Conditions**

Leading means: going ahead, showing the way, “pulling” the group.
Most developers want to achieve good results, yet need orientation and feedback (negative **and** positive).

Provide necessary **infrastructure** and **working conditions** for developers (against: demanding customers, imprecisely stated goals, organisational restructuring, economy measures, tight office space, other projects, etc.).

Quick Excursion: Risk and Riskvalue


risk – a problem, which did not occur yet, but on occurrence threatens important project goals or results. Whether it will occur, cannot be surely predicted.

Ludewig & Lichter (2013)

$$\text{riskvalue} = p \cdot K$$

p : probability of problem occurrence,

K : cost in case of problem occurrence.

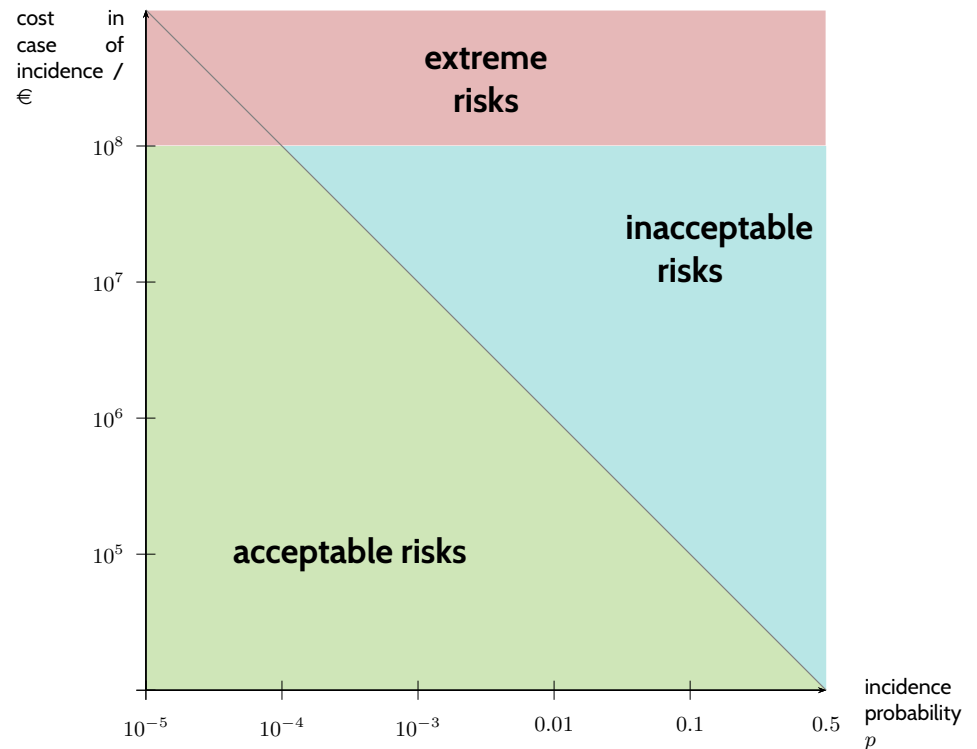

- **Avionics** requires: “Average Probability per Flight Hour for Catastrophic Failure Conditions of 10^{-9} or ‘Extremely Improbable’” (AC 25.1309-1).
- “problems with $p = 0.5$ are not risks, but environment conditions to be dealt with”

Activities of Project Management

Without plans, a project cannot be managed.
Note: mistakes in planning can be hard to resolve.

Work results and project progress have to be **assessed** and **compared to the plans**; it has to be observed whether participants stick to agreements.

- **Planning**
- **Assessment and Control**
- **Recognising and Fighting Difficulties as Early as Possible**

Unforeseen difficulties and problems in projects are not exceptional but usual.
Therefore, project management needs to constantly “screen the horizon for icebergs”, and, when spotting one, react timely and effectively.
In other words: **systematic risk management**.

Distribute information between project participants (project owner, customer, developers, administration).

- **Communication**
- **Leading and Motivation of Employees**
- **Creation and Preservation of Beneficial Conditions**

Leading means: going ahead, showing the way, “pulling” the group.
Most developers want to achieve good results, yet need orientation and feedback (negative **and** positive).

Provide necessary **infrastructure** and **working conditions** for developers (against: demanding customers, imprecisely stated goals, organisational restructuring, economy measures, tight office space, other projects, etc.).

Project Management

Software Engineering
as **defensive discipline**.

Analogy: safety belt;
or hygiene in hospital:

“Dear patient, we’re working hard to
protect you from an infection.”

– “Well, doctor, I thought you were
working to **get me well** again.”

“Software Engineering is **boring** and
frustrating for people who do not
value the defense of failures as a
positive achievement.”

(Ludewig and Lichter, 2013)

04.01.2008 17:49

- **(Software) Project**

- **Project Management**

- Goals and Activities
- Common Activities
- Excursion: Risk



- **Software Project Planning**

- Costs and Deadlines
 - phase, milestone, deadline
- Tasks and Activities
- People and Roles
 - responsibilities and rights

- **Software Development Process**

- process vs. process model
- cycle, life cycle, software life cycle

- **Procedure and Process Models**

Software Project Planning

What to (Plan and) Manage?

Planning and managing software projects involves

- **costs** and **deadlines**,
(→ phase, milestone, deadline)
- **tasks** and **activities**,
- **people** and **roles**.

Phases, Milestones

A **phase** is a continuous, i.e. not interrupted range of time in which certain works are carried out and completed. At the end of each phase, there is a **milestone**.

A phase is **successfully completed** if the criteria defined by the milestone are satisfied.

Ludewig & Lichter (2013)

- Phases (in this sense) **do not overlap!**
Yet there may be different “threads of development” running in parallel, structured by different milestones.
- Splitting a project into phases **makes controlling easier**;
milestones may involve the customer (accept intermediate results) and trigger payments.
- The **granularity** of the phase structuring is critical:
 - very short phases may not be tolerated by a customer,
 - very long phases may mask significant delays longer than necessary.

If necessary:

define **internal** (customer not involved) and **external** (customer involved) milestones.

Milestones, Deadlines

A **phase** is a continuous, i.e. not interrupted range of time in which certain works are carried out and completed. At the end of each phase, there is a **milestone**.

A phase is **successfully completed** if the criteria defined by the milestone are satisfied.

Ludewig & Lichter (2013)


- Whether a milestone is **reached** (or successfully completed) must be **assessable** by
 - clear,
 - objective, and
 - unambiguouscriteria.
- The **definition of a milestone** often comprises:
 - a definition of the **results** which need to be achieved,
 - the required **quality** properties of these results,
 - the desired **time** for reaching the milestone (the **deadline**), and
 - the instance (person or committee) which **decides** whether the milestone is reached.
- Milestones can be part of the **development contract**;
not reaching a defined milestone as planned can lead to **legal claims**.

What to (Plan and) Manage?

Planning and managing software projects involves

- **costs** and **deadlines**,
(→ phase, milestone, deadline)
- **tasks** and **activities**,
- **people** and **roles**.

Common Activities in Order to Develop or Adapt Software

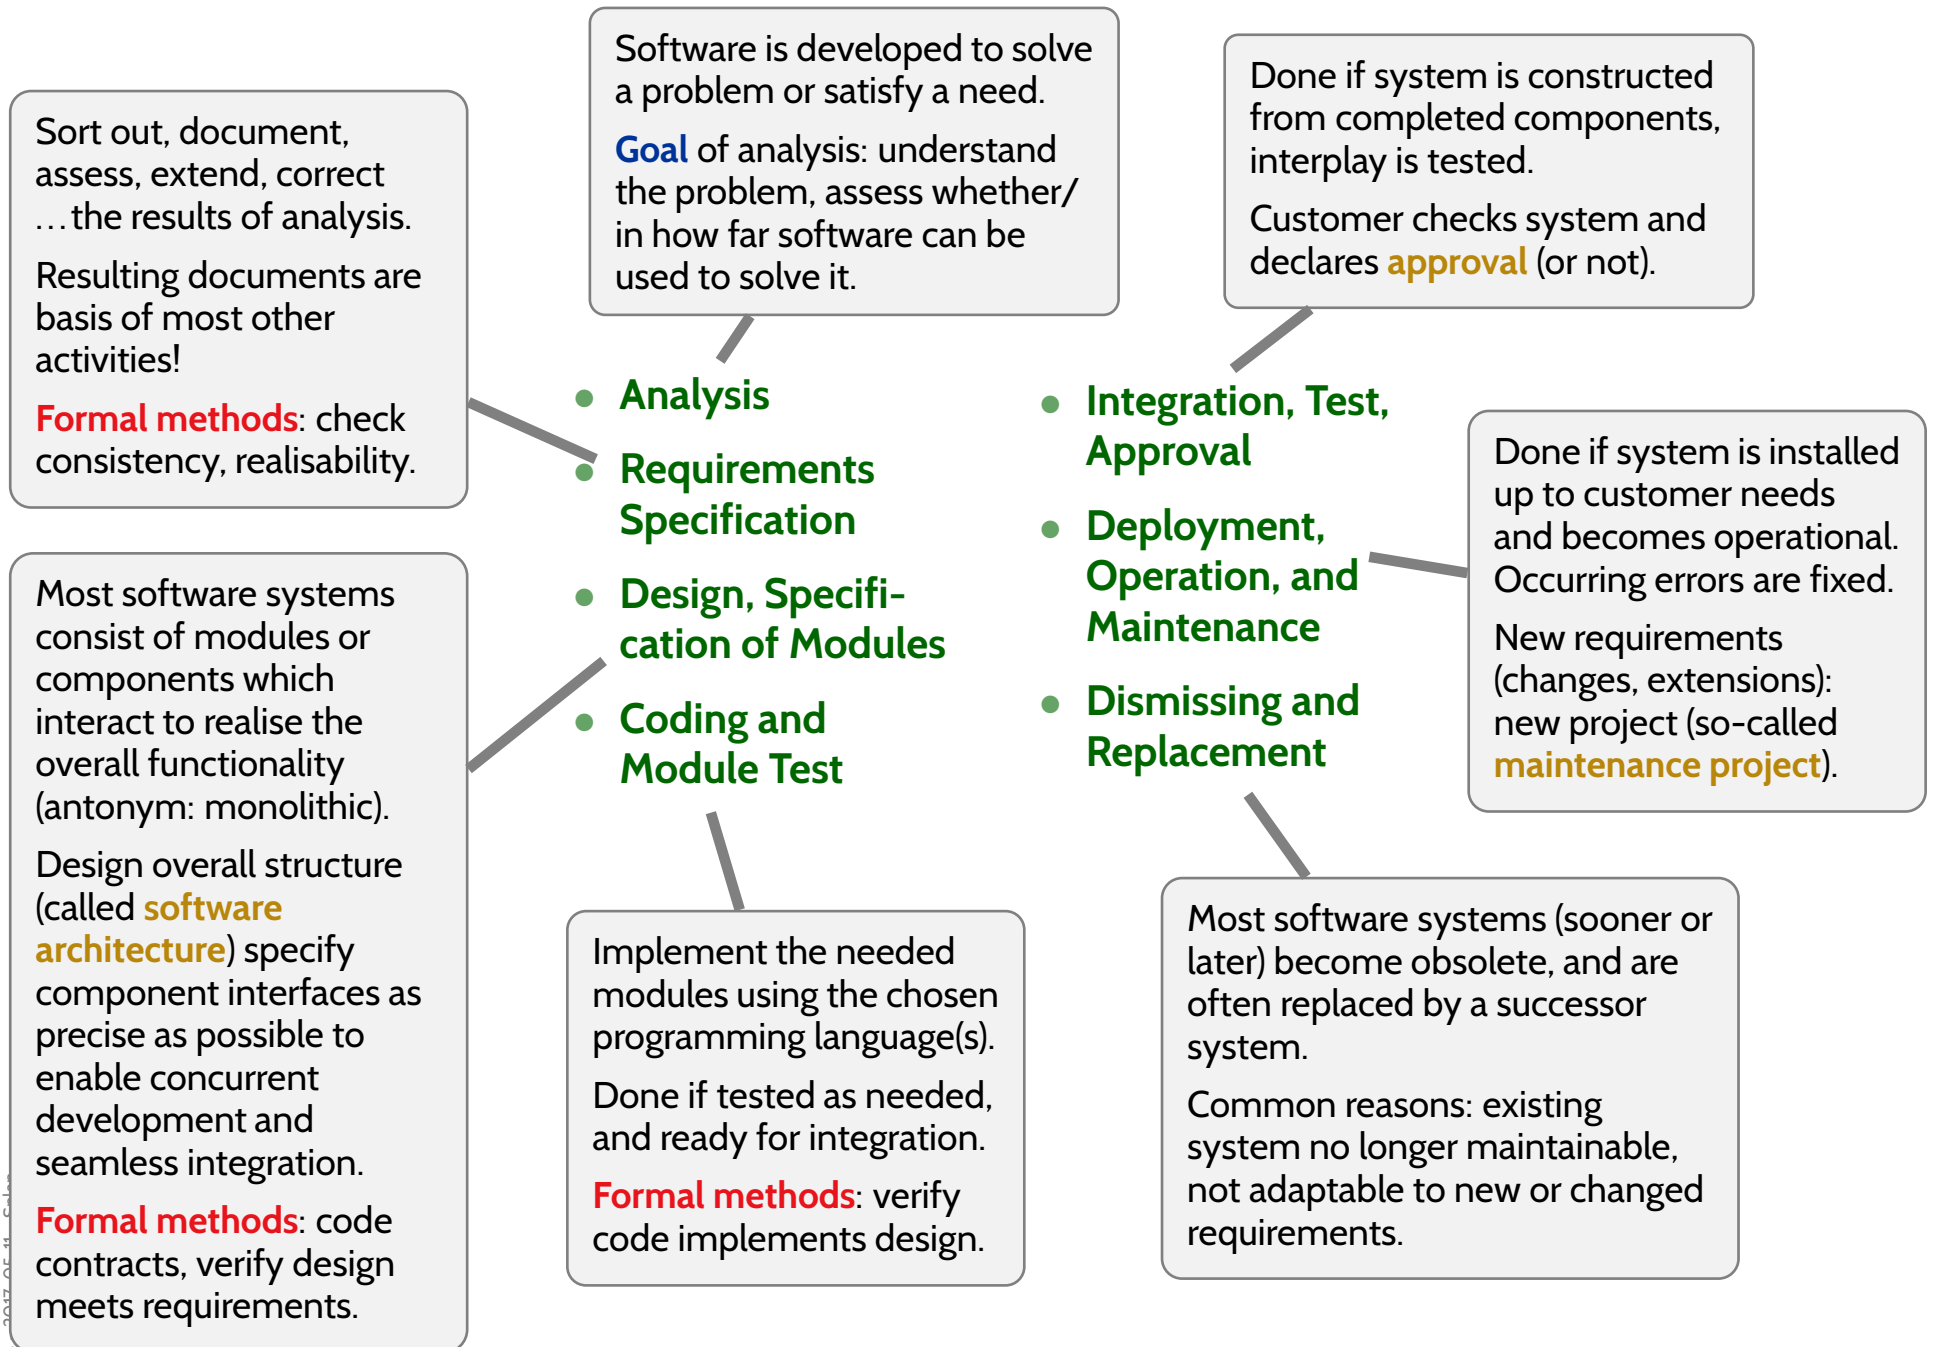

What to (Plan and) Manage?

Planning and managing software projects involves

- **costs** and **deadlines**,
(→ phase, milestone, deadline)
- **tasks** and **activities**,
- **people** and **roles**.

The Concept of Roles

In a software project, at each point in time,
there is a set R of (active) **roles**, e.g. $R = \{ \boxed{\text{mgr}}, \boxed{\text{prg}}, \boxed{\text{tst}}, \boxed{\text{ana}} \}$.

A role has **responsibilities** and **rights**, and necessary skills and capabilities.

For example,

- $\boxed{\text{mgr}}$: project manager
 - has the **right** to raise issue reports
 - is **responsible** for closing issue reports
- $\boxed{\text{prg}}$: programmer
 - has the **right** to change the code
 - is **responsible** for reporting unforeseen problems to the project manager
 - is **responsible** for respecting coding conventions
 - is **responsible** for addressing issue reports
- $\boxed{\text{tst}}$: test engineer
 - has the **right** to raise issue reports
 - is **responsible** for quality control

The Concept of Roles Cont'd

Given a set R of roles, e.g. $R = \{\text{mgr}, \text{prg}, \text{tst}, \text{ana}\}$,

and a set P of people, e.g. $P = \{\text{red}, \text{yellow}, \text{green}, \text{blue}, \text{purple}\}$, each with **skills** or **capabilities**.

An aspect of project management is to assign (a set of) people to each role:

$$\text{assign} : R \rightarrow 2^P$$

← powerset of P

such that each person $p \in \text{assign}(r)$ assigned to role r has (at least) the skills and capabilities required by role r .


Note: assign may change over time, there may be different assignments for different phases.

Sanity check: ensure that $\text{assign}(r) \neq \emptyset$ for each role r .

- Example:**



one person, one role




multiple persons, one role




one person, multiple roles

$$\text{assign} = \left\{ \text{mgr} \mapsto \{\text{blue}\}, \text{prg} \mapsto \{\text{red}, \text{yellow}, \text{purple}\}, \text{tst} \mapsto \{\text{green}\}, \text{ana} \mapsto \{\text{green}\} \right\}$$


Useful and Common Roles

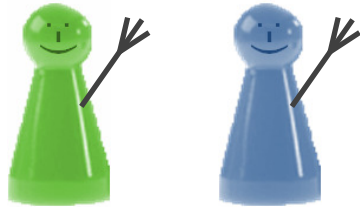

Customer Developer



Clients



Software people

Recall: **roles** “Customer” and “Developer” are assumed by **legal persons**, which often represent many people.

The same legal person may act as “Customer” and “Developer” in the same project.

Useful and common roles in software projects:

- **customer, user**
- **project manager**
- **(systems) analyst**
- **software architect, designer**
- **(lead) developer**
programmer, tester, ...
- **maintenance engineer**
- **systems administrator**
- **invisible clients:** legislator,
norm/standard supervisory committee

- **(Software) Project**

- **Project Management**

- Goals and Activities
- Common Activities
- Excursion: Risk

- **Software Project Planning**

- Costs and Deadlines
 - phase, milestone, deadline
- Tasks and Activities
- People and Roles
 - responsibilities and rights

- **Software Development Process**

- process vs. process model
- cycle, life cycle, software life cycle

- **Procedure and Process Models**

Software Development Process

Process –

- (1) A sequence of steps performed for a given purpose; for example, the software development process.
- (2) See also: task; job.
- (3) To perform operations on data.

IEEE 610.12 (1990)

Software Development Process –

The process by which user needs are translated into a software product. The process involves **translating** user needs into **software requirements**, **transforming** the software requirements into **design**, **implementing** the design in **code**, **testing** the code, and sometimes, **installing and checking out** the software for **operational use**.



IEEE 610.12 (1990)

- The process of a software development project may be
 - implicit,
 - informally agreed on, or
 - explicitly prescribed (by a **procedure** or **process model**).
- **Note:** each software development project **has** a process!


Describing Software Development Processes

Over time, the following **notions** proved useful to describe and model (→ in a minute) software development processes:

- **role** – has responsibilities and rights, needs skills and capabilities.
In particular: responsibility for **artefacts**, participates in **activities**.
- **artefact** – all documents, evaluation protocols, software modules, etc., all products emerging during a development process.
Is processed by **activities**, may have **state**.
- **activity** – any processing of artefacts, manually or automatic.
Depends on **artefacts**, creates/modifies **artefacts**.
- **decision point** – special case of activity: a decision is made based on **artefacts** (in a certain state), creates a **decision artefacts**.
Delimits phases, **corresponds to milestone**.

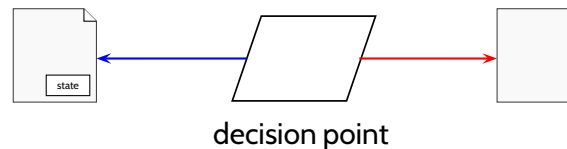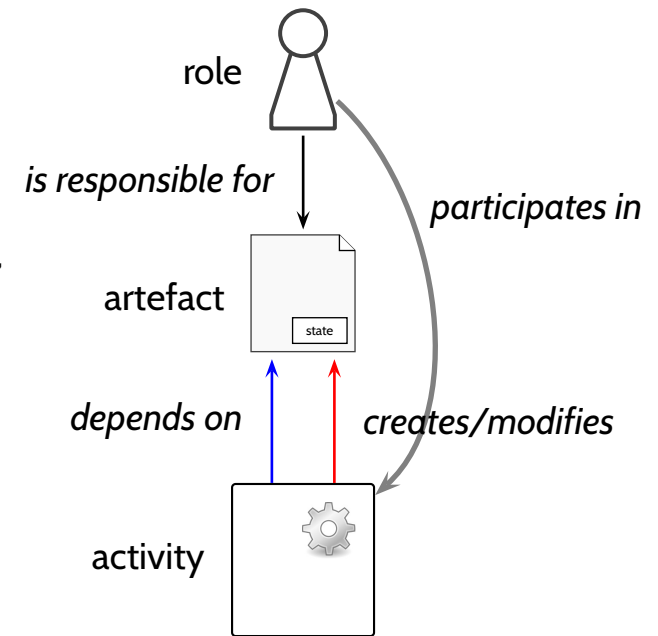


How Software S May Have Been Created...

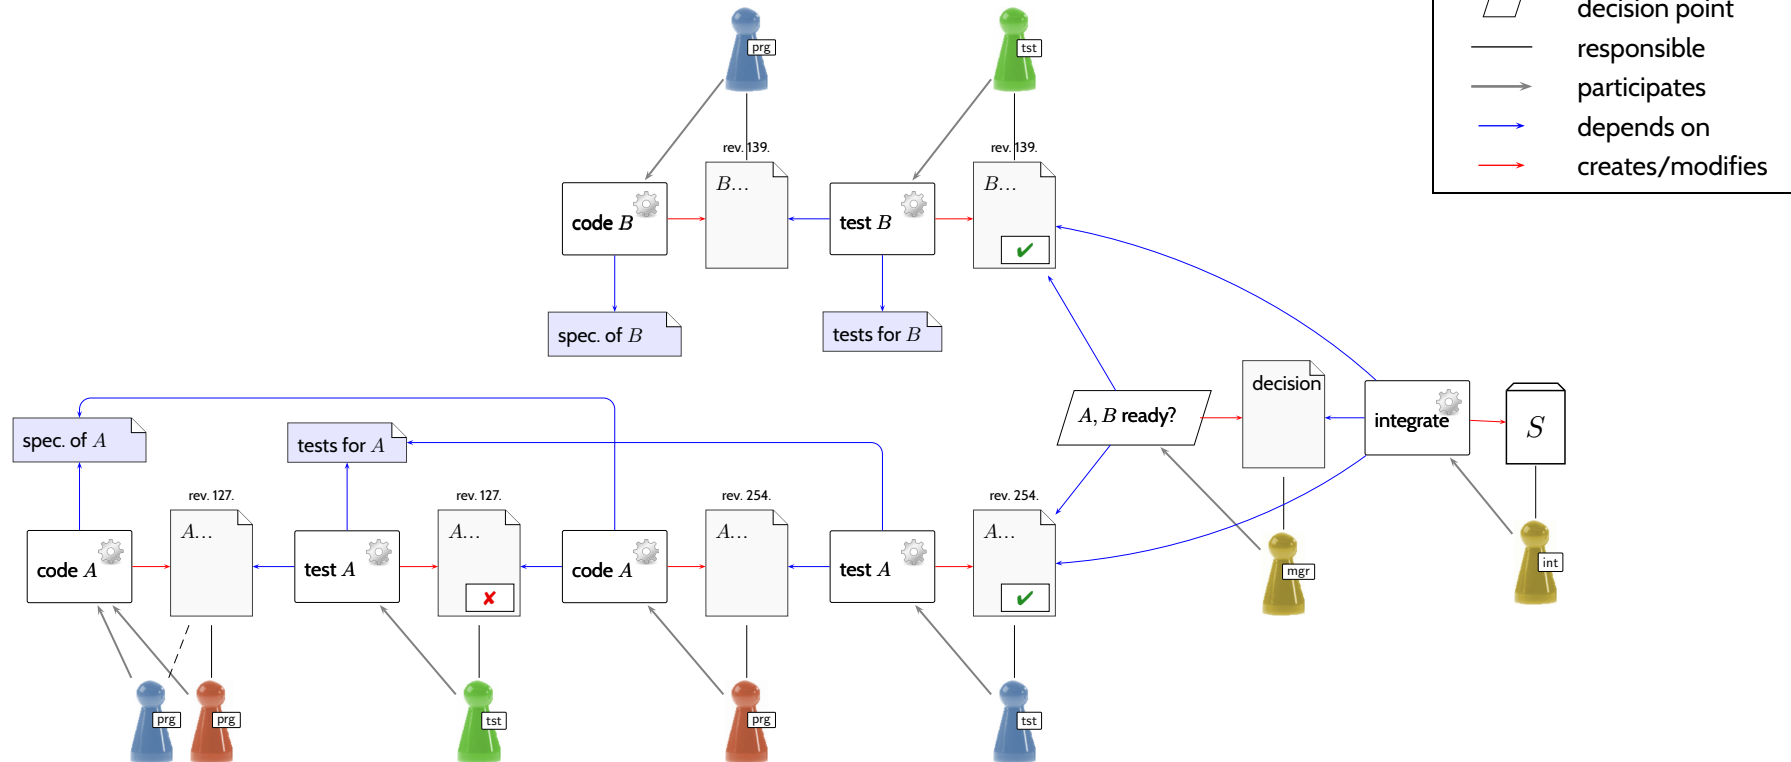


- S consists of modules A and B .
- Assume: specifications and test cases for A and B were available.
- Person prg (blue) coded B (according to spec.), then person tst (green) tested B (with test cases), no errors found.
- Person prg (blue) coded A , with the help of person prg (red). Then person tst (green) tested A , some errors found.
- Person prg (red) fixed A , person prg (blue) tested again, no errors found.
- A and B ready caused a positive decision, then person mgr (yellow) integrated A and B and obtained S .

How the Plan for Creating S May Have Looked Like.

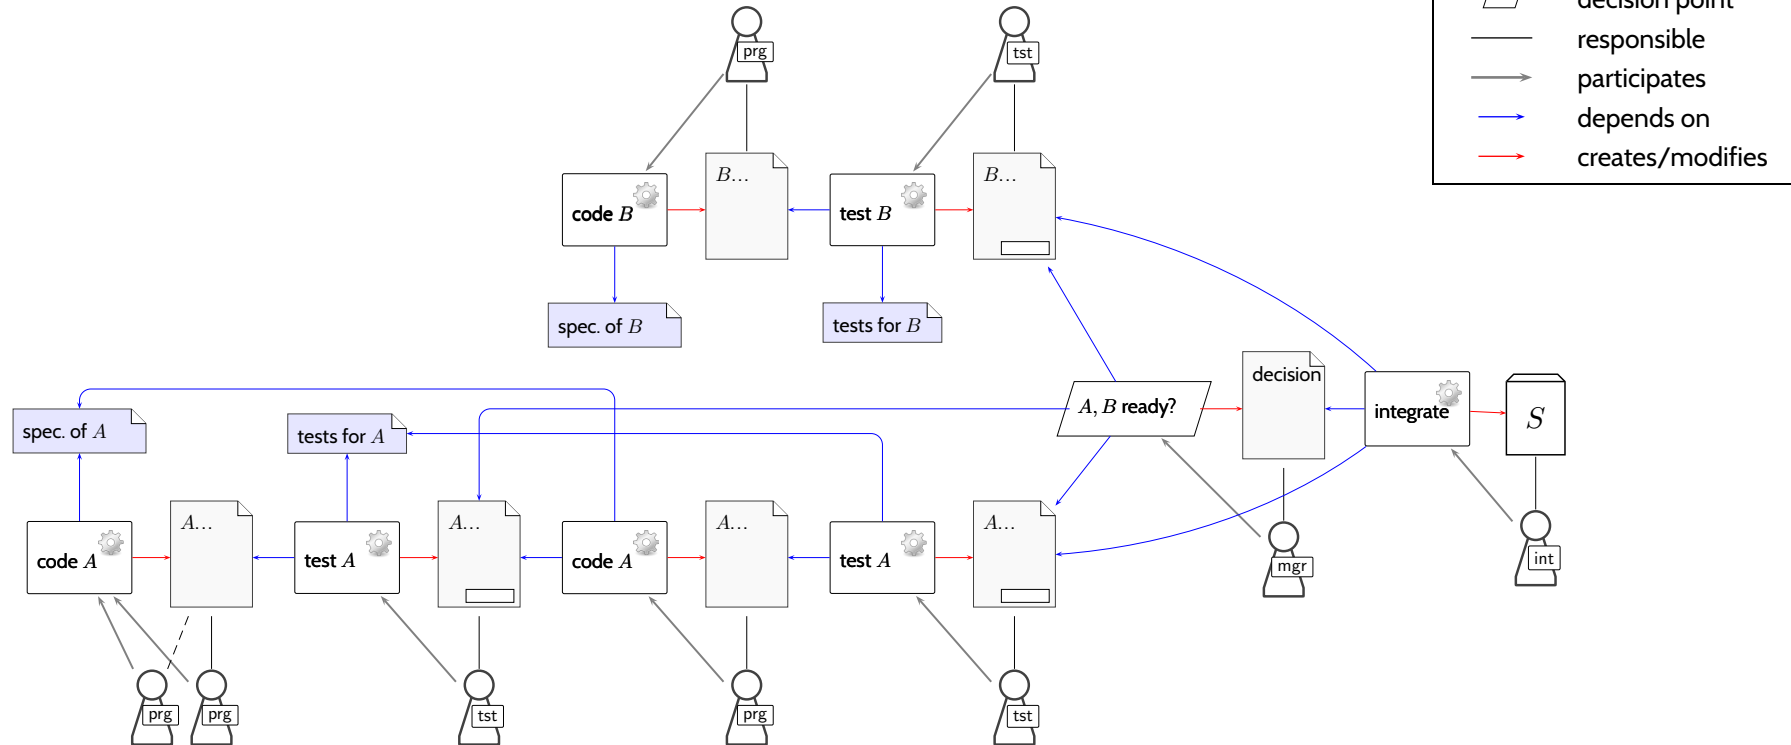


- S consists of modules A and B ; specifications and test cases for A and B are available.
- Some `prg` codes B (according to spec.), then some `tst` tests B (with test cases), and creates test report.
- Some `prg` codes A , with the help of some `prg`. Then some `tst` tests A , and creates test report.
- If errors in A found, some single `prg` fixes A , some `tst` tests again, and creates test report.
- If A and B ready causes a positive decision, then some `int` integrates A and B and obtains S .

How the Plan for Creating S May Have Been Created...

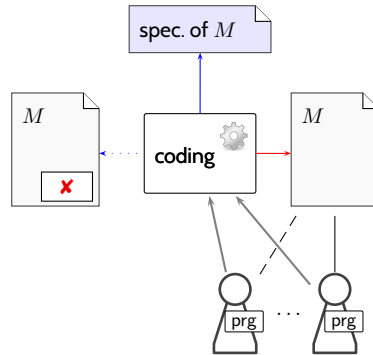


- A **software module** M has a responsible $\boxed{\text{prg}}$, any number of $\boxed{\text{prg}}$ may **help** with work on M .
- A **software module** M is created/modified by activity **coding**.
- Activity **coding** depends on a **specification** of M , and may consider a **positive test report** for M .
- The responsible $\boxed{\text{prg}}$ (and the helper $\boxed{\text{prg}}$'s) participate in activity **coding**.
- Activity **coding** is done, if M exists and there is a negative **test report** for M (all tests passed).

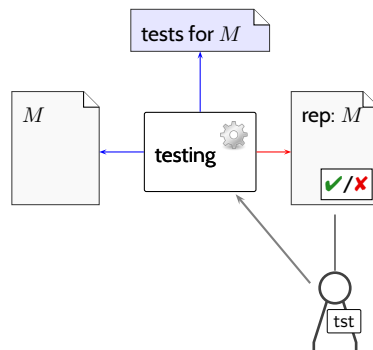


- A **test report** for a module M has a responsible $\boxed{\text{tst}}$.
- A **test report** is created/modified by activity **testing**.
- Activity **testing** depends on **software module** M and **tests** (in state “finished”) for M .
- The responsible $\boxed{\text{tst}}$ participates in activity **testing**.
- Activity **testing** is done, if M exists and there is a negative **test report** for M (all tests passed).

How the Plan for Creating S May Have Been Created...

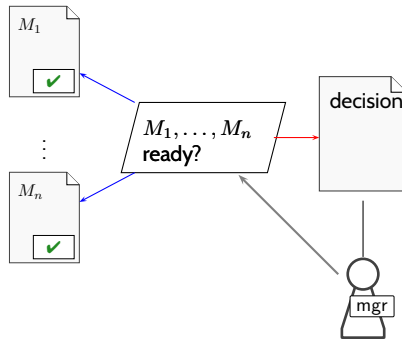

- A **ready decision** for a modules M_1, \dots, M_n has a responsible **mgr**.
- A **ready decision** is created/modified by decision point **ready?**.
- Decision point **ready?** depends on negative **test reports** for M_1, \dots, M_n .
- The responsible **mgr** participates in decision point **ready?**.
- Decision point **ready?** is done, if a positive decision exists.

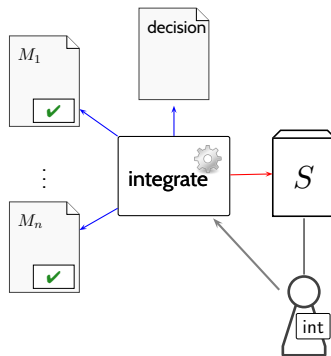




- A **software** S has a responsible **int**.
- **software** S is created by integrating modules M_1, \dots, M_n .
- A **software** is created/modified by activity **integration**.
- Activity **integration** depends on **software modules** M_1, \dots, M_n in state “finished”.
- The responsible **int** participates in activity **integrate**.
- Activity **integration** is done, if S exists.

From Building Blocks to Process (And Back)

Building Blocks


Plan

Process

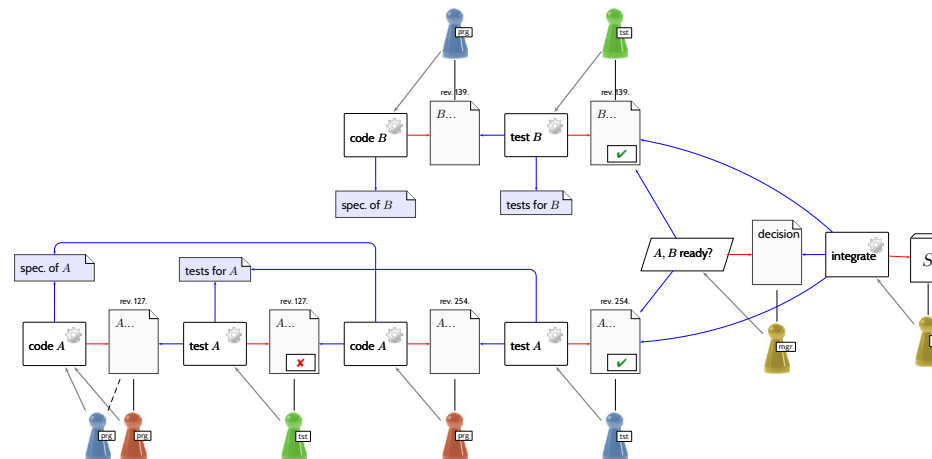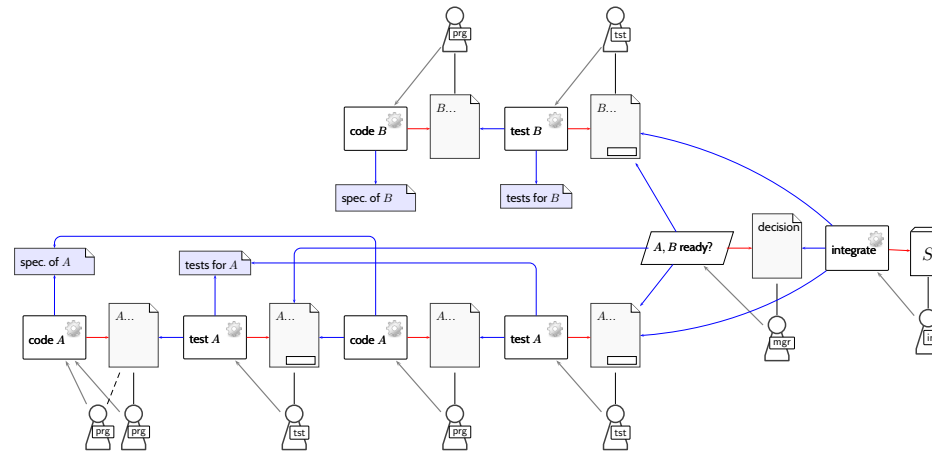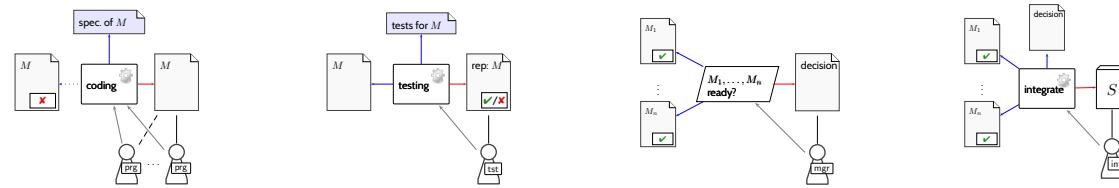

Building Blocks Can Be Arbitrarily Complicated

- **Example:** Distinguish **coding** and **fixing** software.

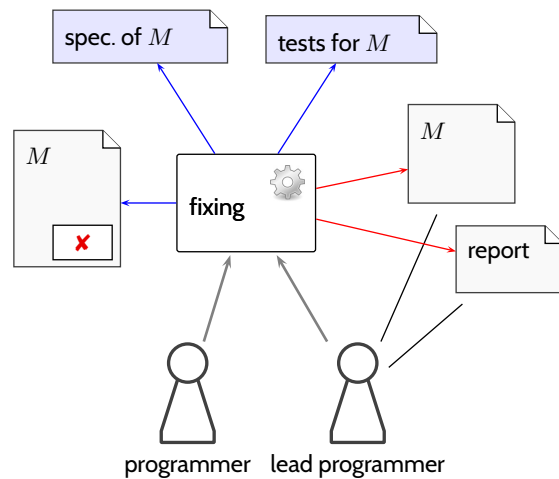

- If there is a negative test result for M ,
- a **lead programmer** is responsible for fixing M ,
- the **programmer** who was responsible for the initial version assist;
- fixing depends on the **test cases**, in addition to the **specification** of M ,
- a **report** (analysis of the error, documentation of the fix) is created.

- Using such **building blocks**, the project management
 - can **prescribe** particular procedures,
 - analyse, which **roles** need to be filled in a project,
 - avoid to “forget” things.

- **(Software) Project**
- **Project Management**
 - Goals and Activities
 - Common Activities
 - Excursion: Risk
- **Software Project Planning**
 - Costs and Deadlines
 - phase, milestone, deadline
 - Tasks and Activities
 - People and Roles
 - responsibilities and rights
- **Software Development Process**
 - process vs. process model
 - cycle, life cycle, software life cycle
- **Procedure and Process Models**

Process vs. Procedure Models

Process Description and Reference Model

process description – documented expression of a set of activities performed to achieve a given purpose.

NOTE: A process description provides **an operational definition of the major components of a process**.

The description specifies, in a **complete, precise, and verifiable** manner, the requirements, design, behavior, or other characteristics of a process.

It also may include **procedures for determining** whether these provisions have been satisfied.

Process descriptions can be found at the **activity, project, or organizational level**.

IEEE 24765 (2010)

process reference model – a model comprising definitions of processes in a life cycle described in terms of process purpose and outcomes, together with an architecture describing the relationships between the processes.

IEEE 24765 (2010)

Cycle and Life Cycle

cycle – (1) A period of time during which a set of events is completed. [...]

IEEE 610.12 (1990)

system life cycle – The period of time that begins when a system is **conceived** and ends when it is **no longer available for use**.

IEEE 610.12 (1990)

software life cycle – The period of time that begins when a software product is **conceived** and ends when the software is no longer **available for use**. [...]

IEEE 610.12 (1990)

software development cycle – The period of time that begins with the **decision to develop** a software product and ends when the software is **delivered**. [...]

IEEE 610.12 (1990)

Software Life and Development Cycle

software life cycle – The period of time that begins when a software product is **conceived** and ends when the software is no longer **available for use**.

The software life cycle typically includes

- a **concept phase**,
- a **requirements phase**,
- a **design phase**,
- an **implementation phase**,
- a **test phase**,
- an **installation and checkout phase**,
- on **operation and maintenance phase**, and,
- sometimes, a **retirement phase**.

Note: These phases may overlap or be performed iteratively.

IEEE 610.12 (1990)

software development cycle – The period of time that begins with the **decision to develop** a software product and ends when the software is **delivered**.

This cycle typically includes

- a **requirements phase**,
- a **design phase**,
- an **implementation phase**,
- a **test phase**, and
- sometimes an **installation and checkout phase**.

Notes:

- (1) the phases listed above may overlap or be performed iteratively, depending upon the software development approach used.
- (2) This term is sometimes used to mean a longer period of time, either the period that ends when the software is no longer being enhanced by the developer, or the entire software life cycle.

IEEE 610.12 (1990)

Process vs. Procedure Model

(Ludewig and Lichter, 2013) propose to distinguish: **process model** and **procedure model**.

- A **Process model** ('Prozessmodell') comprises
 - (i) **Procedure model** ('Vorgehensmodell')
e.g., "waterfall model" (70s/80s).
 - (ii) **Organisational structure** – comprising requirements on
 - project management and responsibilities,
 - quality assurance,
 - documentation, document structure,
 - revision control.

e.g., V-Modell, RUP, XP (90s/00s).

- In the literature, **process model** and **procedure model** are often used as synonyms; there is not universally agreed distinction.

Anticipated Benefits of Process Models

- “economy of thought”
 - don’t re-invent principles.
 - quantification, reproducibility
 - one can **assess the quality** of **how** products are created (→ CMMI).

Identify weaknesses, learn from (bad) experience, improve the process.
 - fewer errors
 - e.g., testing a module cannot be forgotten because the “ready” decision point depends on module with “test passed” flagged.
 - clear responsibilities
 - fewer “I thought **you**’d fix the module!”
-
- **Process model-ing** is easily **overdone** – the best process model is **worthless** if your software people don’t “live” it.
 - Before introducing a process model
 - understand what you have, understand what you need.
 - process-model as much as needed, not more (→ tailoring).
 - assess whether the new/changed process model makes matters better or worse (→ metrics)
 - **Note:** customer may require a certain process model.



Procedure Models

Procedure Model (?!): Code and Fix

Code and Fix – denotes an approach, where coding and correction alternating with ad-hoc tests are the only **consciously** conducted activities of software development.

Ludewig & Lichter (2013)


Advantages:

- Corresponds to our desire to “get ahead”, to solve the stated problem quickly.
- The conducted activities (coding and ad-hoc testing) are easy.

Disadvantages:

- It is **hard to plan** the project, there are no rational/explicit decisions.
- It is **hard to distribute** work over multiple persons or groups.
- If requirements are not stated, there is **no notion of correctness** (= meeting requirements).
- Tests are **lacking expected outcome** (otherwise, e.g., derived from requirements).
- Resulting programs often **hard to maintain**.
- **Effort for maintenance high**: most errors are only detected in operation.
- Important **concepts and decisions are not documented**, but only in the heads of the developers, thus hard to transfer.
- ...

The (In)famous Waterfall Model (*Rosove, 1967*)

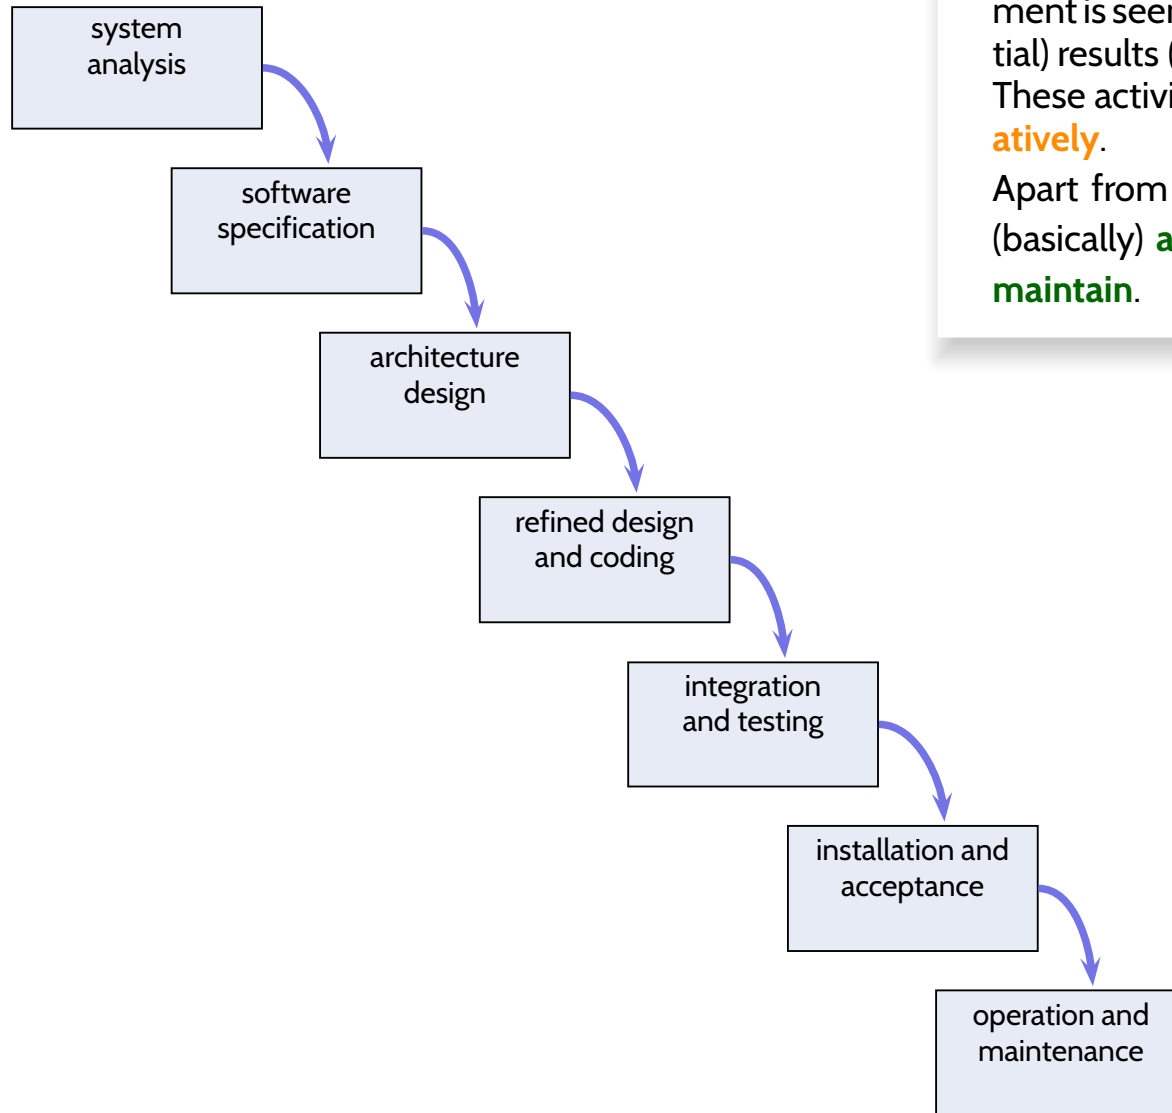


Waterfall or Document-Model– Software development is seen as a **sequence of activities** coupled by (partial) results (documents).

These activities can be conducted **concurrently** or **iteratively**.

Apart from that, the sequence of activities is fixed as (basically) **analyse, specify, design, code, test, install, maintain**.
Ludewig & Lichter (2013)

The (In)famous Waterfall Model (Rosove, 1967)

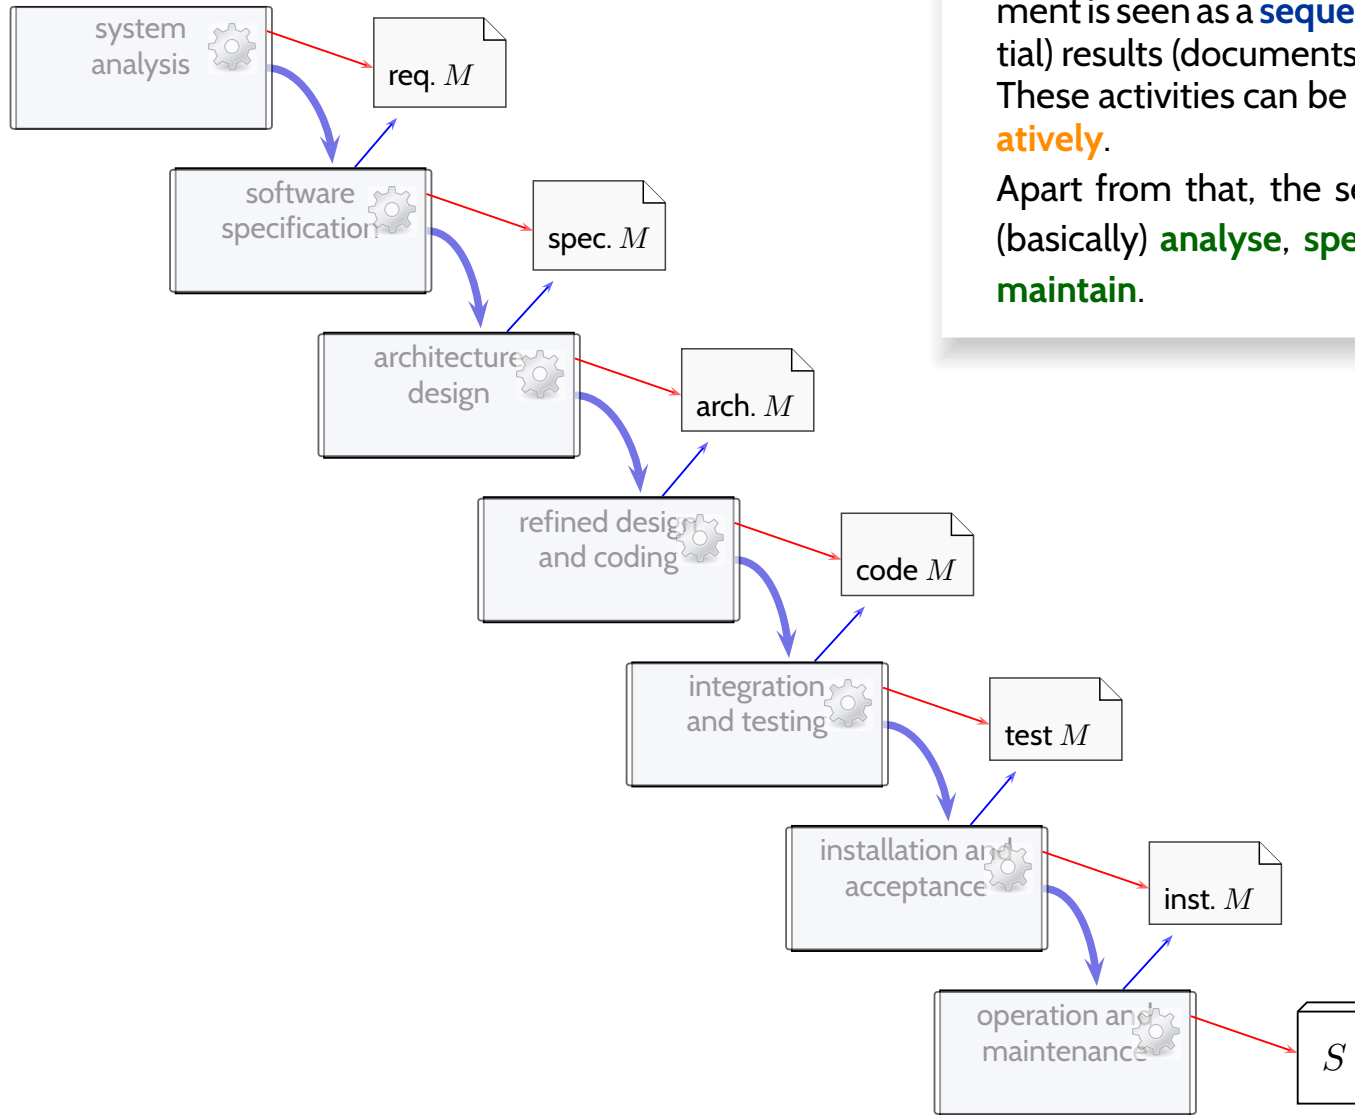


Waterfall or Document-Model– Software development is seen as a **sequence of activities** coupled by (partial) results (documents). These activities can be conducted **concurrently** or **iteratively**.

Apart from that, the sequence of activities is fixed as (basically) **analyse, specify, design, code, test, install, maintain**.
Ludewig & Lichter (2013)


The (In)famous Waterfall Model (*Rosove, 1967*)

Waterfall or Document-Model– Software development is seen as a **sequence of activities** coupled by (partial) results (documents). These activities can be conducted **concurrently** or **iteratively**.

Apart from that, the sequence of activities is fixed as (basically) **analyse, specify, design, code, test, install, maintain**.
Ludewig & Lichter (2013)

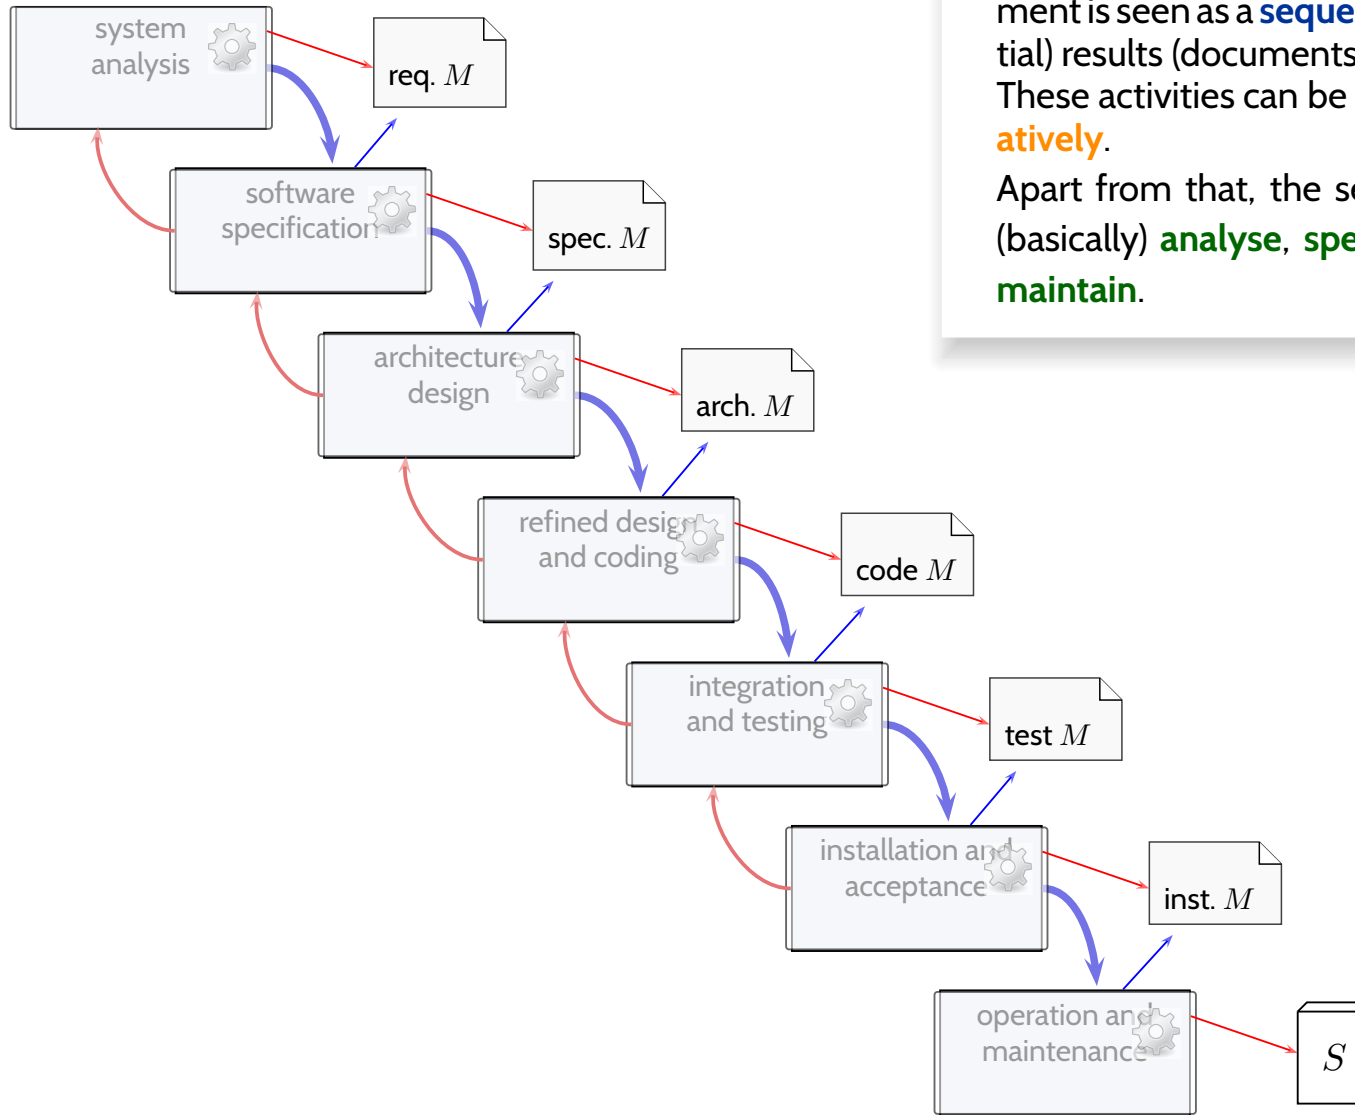

The Waterfall Model: Discussion

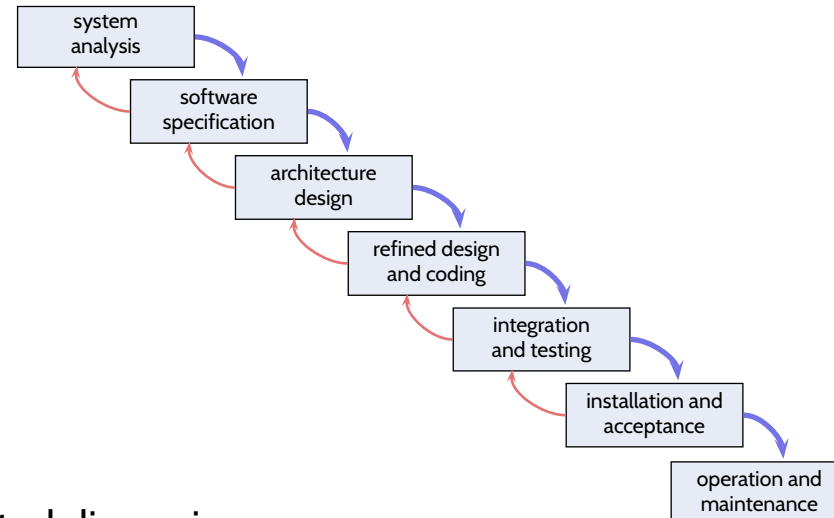

(In)famous?!

- The waterfall model has been subject of heated discussions:
 - Original model without feedback **not realistic**.
 - Gives room for many interpretations; **very abstract**; hardly usable as a “template” for planning real projects.
 - Cycles (and the lack of milestones) makes it hard for project management to **assess a project’s process**.
- Maybe best appreciated in the context of its time:

“Dear people (of the 60’s), there is more in software development than coding; and there are (obvious) dependencies.”

That may have been news to some software people back then... (cf. “**software crisis**”).

- Everybody knows it (at least the name...).

Tell Them What You've Told Them...

- Project; has (among others)
 - project owner, project leader
 - goals (Excursion: Risk)
 - process – each project has one
- processes can be modelled
 - descriptive (“we did it like that”), or
 - prescriptive (“please to it like that”)
- A process model relates
 - roles, artifacts, activities, decision points
 - relations: responsibility, dependency, creation/modification.
- A process model can allow us to (→ exercises)
 - devise a schedule (who does what when)
 - estimate and control phases and deadlines.
- Distinguish procedure model and process model.
- Example: The Waterfall procedure model.

References

References

IEEE (1990). *IEEE Standard Glossary of Software Engineering Terminology*. Std 610.12-1990.

ISO/IEC/IEEE (2010). *Systems and software engineering – Vocabulary*. 24765:2010(E).

Ludewig, J. and Lichter, H. (2013). *Software Engineering*. dpunkt.verlag, 3. edition.

Rosove, P. E. (1967). *Developing Computer-based Information Systems*. John Wiley and Sons.

Thayer, R. H. (1997). *Tutorial – Software Engineering Project Management*. IEEE Society Press, revised edition.