Lecture 8: Scenarios & Use Cases Softwaretechnik / Software-Engineering

2019-05-27

Prof. Dr. Andreas Podelski, Dr. Bernd Westphal

Albert-Ludwigs-Universität Freiburg, Germany

VLS • Introduction
• Definition: Software & SW Specification
• Requirements Specification
• Desired Properties
• Kinds of Requirements
• Analysis Techniques Documents
 Documents
 Documents
 Documents
 Documents
 Specification Inaguages
 Natural Language
 Docision Tables
 Syrax, Smantics
 Compilererss, Consistercy....

Topic Area Requirements Engineering: Content

Vocabulary
Techniques
Informal
A
Segret-formal


Scenarios

User Stories, Use Cases
Live Sequence Charts

Syntax, Semantics Wrap-Up

Scenarios

Recall: The Crux of Requirements Engineering



One quite effective approach:

try to approximate the requirements with positive and negative scenarios.

- Dear customer, please describe example usages of the desired system.

 Customerication: "If the system is on at all able to do this, then it not what I want."

 Dear customer, please describe behaviour that the desired system must not show.

 Customerication: "If the system does this, then it's too what I want."

 Customerication: "If the system does this, then it's too what I want."
- From there on, refine and generalise: what about exceptional cases? what about corner-cases? etc.
 Prominent early advocate: OOSE (Jacobson, 1992).

Content

Scenarios: The idea
 Use Cases
 Use Case Dagams
 User Stories
 Sequence Dagams
 A Bief History
 LSC Red-y-max
 LSC Red-y-max
 West-demonstrators
 West-demonstrators
 Advantage Caster
 Cast. Frederics
 Cast. Advantage Control

∟(e Excursion: Symbolic Büchi Automata

Informatik III (Automata Theory)



Notations for Scenarios

- The idea of scenarios (sometimes without negative or anti-scenarios) (re-)occurs in many process models or software development approaches.
- Use Cases and Use Case Diagrams (OOSE)

In the following, we will discuss two-and-a-half notations:

- User Stories (part of Extreme Programming)
- Sequence Diagrams (here: Live Sequence Charts (Damm and Harel, 2001))

Use Cases

Use Case: Definition

Use Case — A sequence of interactions between an <u>actor</u> (or actors) and a <u>system</u> triggered by a specific actor, which <u>produces a result</u> for an actor. (accessor, 1992)

Use Case Example: ATM Authentication

20-27 - Sac -																				
	exception case 2a									normal case	open questions	actors	exceptional case	nost-cond in	post-condition		pre-condition	goal	name	
2a.1 ATM displays "card not readable"	card not readable			7 bank system checks PIN	6. ATM reads PIN,	5. client enters PIN		3. bank system checks validity	ATM read card, sends data to bank system	 client inserts card 	none	client (main actor), bank system	withheld, welcome screen displayed	access denied card returned or	client accepted, services of ATM are offered	card and PIN of clientare available	the ATM is operational, the welcome	the client wants access to the ATM	Authentication	
exc.case7b	exc.case 7a	exc.case 6a	exc.case 5b	exc.case 5a	exc.case3a	exc.case2c		exc.case 2b												
third PIN	first or s	no conn	client do	client ca	card not	no conn	card	card read												

Gold automat

Acor an actor represent
Acor as obe which a user or a external
system may assume when intending with
the system under design.

* Actors are not part of the system
that they are not described in deglat.

* Actors of actors are noty-efferministic
(possibly constanged by domain model).

A use case is triggered by a stimulus as input to be eminmenten.

A use case is put be eminmenten.

A use case is particular goal.

A use case describe affirmations phone on the system and the particular goal.

A use case describe affirmations phone of the system and the particular goal in that are needed to achieve the goal in that are needed to achieve the goal in the particular trigger of the particul

Use Case: More Precisely

Once Again: Use Case Definition

Use Case — A sequence of interactions between an actor (or actors) and a system triggered by a specific actor, which produces a result for an actor.


(acobson, 1992)

Authentication Client (main actor)

Use Case Diagrams: Basic Building Blocks

Example: Use Case Diagram of the ATM Use Case

Use Case Diagrams



1346

Use Case Diagrams: More Building Blocks

Example: Use Case Diagram of the ATM Use Case

More notation:

More notation:

we case A

we case b

or:

(lose case name)

(lose case name)

or:

(lose case name)

we case b

or:

(lose case name)


or:

or:

(lose case name)

17,46

Use Case Diagram: Bigger Examples





Sequence Diagrams

A River History

Lee A Sequence Charts

Lee LSC Body Syntax

Lee LSC Body Syntax

To Well-Formardies:

Found's Semantics:

Lee Case Federics

Automation Continuation

A Automation Continuation User Stories

(e Excursion: Symbolic Büchi Automata

User Stories

User Stories: Discussion

User Stories (Beck, 1999)

Per user story, use one file card - proposed card layout (front side):

priority unique identifier, name estimation

As a [role] I want (something) so that (benefit)

"A User Story is a concise, written description of a piece of functionality that will be valuable to a user (orowner) of the software."

• . • anx

Carlies when and anterwhat conditions the activity takes place
and MSS Edelighted SHOLD, leads) at WiLL forenesses,
and MSS FOOT broaded and
and MSS FOOT broaded and
and an "the splann" of the accesses around at fails Juyann
one of these possibilities
one of these possibilities
of the "cardiative all activities and detect by the system to somethods).

20/46

Natural Language Patterns

Natural language requirements can be (tried to be) written as an instance of the pattern " $\langle A \rangle \langle B \rangle \langle C \rangle \langle D \rangle \langle E \rangle$ " (German gramma) where

x may get difficult to keep overview over whole system to be developed → maybe best sured for changes (extensions (after first treation).

X not designed to cover nor-functional requirements and restrictions
X agile spirit: strong dependency on compretent developers
X estimation of effort may be difficult ✓ easy to create, small units
 ✓ close contact to customer
 ✓ objective / testable: by fixing test cases early

Customer and Developer Happy?



2246

21,46

User Stories (Beck, 1999)

"A User Story is a concise, written description of a piece of functionality that will be valuable to a user (or owner) of the software."

Per user story, use one file card — proposed card layout (front side):



the user story, e.g. following the pattern:

As a [role] I want [something] so that [benefit].

 unique identifier (e.g. unique number),
 priority (from 1 (highest) to 10 (lowest))
 assigned by customer,
 effort, estimated by developers, back side of file card:
 (acceptance) test case(s),
 i.e., how to tell whether the
 user story has been realised.



Scenarios: The idea
 Use Cases
 User Stories
 Sequence Diagrams
 Red Honcy
 User Sequence Chart
 User Stories
 Us

Sequence Diagrams

Content

Informatik III
(Automata
Theory)

Live Sequence Charts (2018 Edition) A Brief History of Sequence Diagrams

Message Sequence Chart,
If Janabacked in different versions (ITUZ 120, St. editors 1993); often acused of lacting a formal semantics.

For the lecture, we consider
 Live Sequence Charts (LSGs)
 Command Harel, 2001; Kose, 2003; Harel and Marely, 200
 LSGs have a common fragment with UML 2x SDx (Harel and Mazz, 2007).

* Sequence Diagrams of UML 1x (one of three main authors I, Jacobson)

* SDp.of UML 2.x address some issues, yet the standard exhibits underlies undergroup conditions fraide and baze, 2007; Sorine, 2003)

[fraide and baze, 2007; Sorine, 2003]

V Control of Control o

Concrete syntax

((C, \(\triangle \)), \(\triangle \)

Cond. Loch(\(\triangle \)), \(\triangle \)

Cond. Loch(\(\triangle \), \(\triangle \)

Cond. Loch(\(\triangle \), \(\triangle \)

Cond. Loch(\(\triangle \), \(\triangle \)

Abstract syntax

Abstract syntax

((C, \(\triangle \)), \(\triangle \)

((C, \(\triangle \)), \(\triangle \)

Cond. Loch(\(\triangle \), \

The Plan: A Formal Semantics for a Visual Formalism

2846

27,46

From Concrete to Abstract Syntax

$$\begin{split} & \underbrace{\log \log \mathcal{L}_{i}}_{C_{i}} & \underbrace{\leq C_{i} \mathcal{L} \times \mathcal{L}}_{C_{i}} \\ & \mathcal{I} = \{f_{1}, \dots, f_{n}\}_{i} \\ & \text{Mig}_{C_{i}} \mathcal{C} \times \mathcal{E} \times \mathcal{L}, \\ & \text{Cand}_{C_{i}} \mathcal{C} \times \mathcal{C} \times \mathcal{C}_{i} \\ & \text{Lache}_{C_{i}} \mathcal{C} \times \{o, \bullet\} \times \Phi(C) \times \mathcal{L} \times \{o, \bullet\}, \\ & \theta : \mathcal{L} \cup \text{Mag}_{C_{i}} \cup \text{Cand} \cup \text{Lache}_{O_{i}} \times \mathcal{L} \times \{o, \bullet\}, \\ \end{split}$$

32/46

LSC Body Syntax

29,46

LSC Body Building Blocks

(hot) condition (hot) instantaneous message (cold) line segment

From Concrete to Abstract Syntax

$$\begin{split} & \leq \subseteq \mathcal{L} \times \mathcal{L}, \quad \sim \subseteq \mathcal{L} \times \mathcal{L} \\ & = \{ f_1, \dots, f_d \}, \\ & = \{ h_0 \subseteq \mathcal{L} \times \mathcal{L}, \\ & = \{ f_1 \in \mathcal{L} \times \mathcal{L}, \\ & = \{ f_2 \in \mathcal{L} \times \{ h_1 + h_2 \}, \\ & = \{ f_2 \in \mathcal{L} \times \{ h_2 + h_2 \}, \\ & = \{ f_2 \in \mathcal{L} \times$$
13, 1, 4, 12,0, 12,1, 12,2, 12,3, 13,0, 13,1, 13,2, 13,3}

LSC Body: Abstract Syntax

Definition, [LSC Body] Let $\mathcal E$ be a set of elements and $\mathcal C$ a set of atomic propositions, $\mathcal E\cap\mathcal C=\emptyset$. An LSC body over $\mathcal E$ and $\mathcal C$ is a tuple $((\mathcal{L}, \preceq, \sim), \mathcal{I}, \mathsf{Msg}, \mathsf{Cond}, \mathsf{LocInv}, \Theta)$

- * L is a finite, non-empty set of locations with * L is a finite, non-empty set of locations with $* L = \{l_1, \dots, l_n\} \text{ is a partitioning of C-elements of T are called instance line.}$
- Msg $\subseteq \mathcal{L} \times \mathcal{E} \times \mathcal{L}$ is a set of messages with $(l,E,l') \in \mathsf{Msg}$ only if $(l,l') \in \prec \cup \sim$; message (l,E,l') is called instantaneous iff $l \sim l'$ and asynchronous otherwise.
- $\bullet \; \operatorname{Cond} \subseteq (2^{\mathcal{L}} \setminus \emptyset) \times \Phi(\mathcal{C}) \text{ is a set of conditions} \\ \text{ with } (L,\phi) \in \operatorname{Cond only } \mathbb{H} I \sim I' \text{ for all } I \neq I' \in L, \\$
- $\bullet \ \Theta: \mathcal{L} \cup \mathsf{Msg} \cup \mathsf{Cond} \cup \mathsf{LocInv} \to \{\mathsf{hot}, \mathsf{cold}\}$ assigns to each location and each element a temperature * LocInv $\subseteq \mathcal{L} \times \{c, ullet \} \times \Phi(\mathcal{C}) \times \mathcal{L} \times \{c, ullet \}$ is a set of local invariants with $(l, \iota_l, \phi, l', \iota') \in \mathsf{LocInv}$ only if $l \prec l', o$: exclusive, \bullet : inclusive,

LSC Body: Abstract Syntax


Definition [i.SC Body] Let $\mathcal E$ be a set of events and $\mathcal C$ a set of atomic propositions, $\mathcal E\cap\mathcal C=\emptyset$. An LSC body over $\mathcal E$ and $\mathcal C$ is a tuple

 $((\mathcal{L}, \preceq, \sim), \mathcal{I}, \mathsf{Msg}, \mathsf{Cond}, \mathsf{LocInv}, \Theta)$


- ∠ is a finite, non-empty set of locations with
 a partial order ∠ ⊆ ∠ × ∠,
 a symmetric simultaneity relation ~ ⊆ ∠ × ∠ disjoint with ∠, i.e. ∠ ∩ ~ = ∅,
- * $\mathcal{I}=\{I_1,\dots,I_n\}$ is a partitioning of \mathcal{L} -elements of \mathcal{L} are called instance line, * $\mathrm{Mag}\subseteq\mathcal{L}\times\mathcal{E}\times\mathcal{L}$ is a set of messages with $(I,E,I')\in\mathrm{Mag}$ only $I(I,I')\in\mathcal{A}\cup\mathcal{A}$; message (I,E,I') is called instantaneous iff $I\sim I'$ and asynchronous otherwise.

- ** Cond $\subseteq (2^{d_{-}}(v)) \times \Phi(C)$ is a set of conditions with $(L, \phi) \in Condonly \ \ell i \sim \ell'$ for all $t \neq \ell' \in L$.

 *** Leaftw $\subseteq L \times \{o, +\} \times \Phi(C) \times L \times \{o, +\}$ is a set of local invariants with $(\ell_1, \iota, \phi, \ell', \iota') \in Lochnvonly \ \ell i \neq \ell' \in Condonle \circ Condonle$
- $\bullet \; \Theta: \mathcal{L} \cup \mathsf{Msg} \cup \mathsf{Cond} \cup \mathsf{LocInv} \to \{\mathsf{hot}, \mathsf{cold}\}$ assigns to each location and each element a temperature.





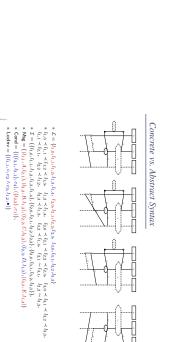

LSC Semantics: Towards Automaton Construction

LSC Semantics: It's in the Cuts!

A non-empty set $\emptyset \neq C \subseteq \mathcal{L}$ is called a cut of the LSC body iff C • is downward dosed, i.e. Definition. Let $((\mathcal{L}, \preceq, \sim), \mathcal{I}, \mathsf{Msg}, \mathsf{Cond}, \mathsf{LocInv}, \Theta)$ be an LSC body.

 $\forall \, l, l' \in \mathcal{L} \bullet \, l' \in C \, \land \, l \preceq l' \implies l \in C,$

Content

 Scenarios: The Idea
 Use Cases User Stories → Use Case Diagrams

Sequence Diagrams
 A Boel His tory
 Be Sequence Charts
 Sequence Charts

e Excursion: Symbolic Büchi Automata

37,46

38,46

that is, \boldsymbol{C} is hot if and only if at least one of its maximal elements is hot.

39,46

 $\Theta(C) = \begin{cases} \text{hot} & \text{if } \exists \, l \in C \bullet (\sharp \, l' \in C \bullet l \prec l') \land \Theta(l) = \text{hot} \\ \text{cold} & \text{otherwise} \end{cases}$

The temperature function is extended to cuts as follows: - comprises at least one location per instance line, i.e. $\forall I \in \mathcal{I} \bullet C \cap I \neq \emptyset.$ \bullet is closed under simultaneity, i.e. $\forall l,l'\in\mathcal{L}\bullet l'\in C\land l\sim l'\implies l\in C, \text{and}$

Well-Formedness

Bondedness/no floating conditions: (could be relaxed a little if we wanted to)


- For each location $l \in \mathcal{L}$, if l is the location of
- a local invariant, i.e. \exists $(l_1, \iota_1, \phi, l_2, \iota_2) \in \mathsf{LocInv} : l \in \{l_1, l_2\}.$ • a condition, i.e. \exists $(L, \phi) \in Cond : l \in L$, or
- then there is a location l' simultaneous to l, i.e. $l \sim l'$, which is the location of
- ullet an instance head, i.e. l' is minimal wrt. \preceq , or
- a message, i.e.


 $\exists \, (l_1, E, l_2) \in \mathsf{Msg} \, : l \in \{l_1, l_2\}.$


Note: if messages in a chart are cyclic then there doesn't exist a partial order (so such diagrams don't even have an abstract syntax).


3546




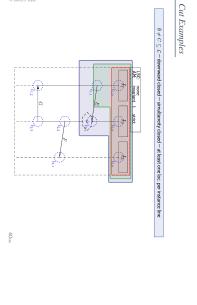


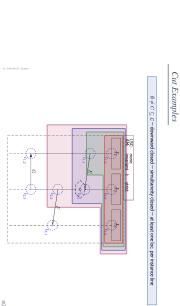

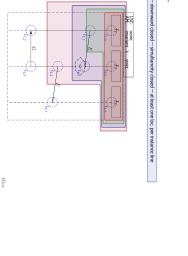

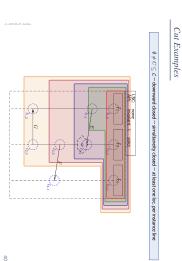


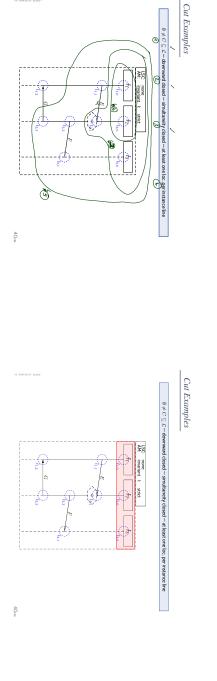

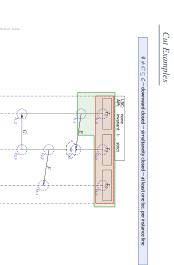

40,46

$\emptyset \neq C \subseteq \mathcal{L}-\mathsf{downward}$ closed — simultaneity closed — at least one loc. per instance line




40,46

Successor Cut Example

Successor Cut Example

 $C\cap\mathcal{F}=\emptyset-C\cup\mathcal{F}$ is a cut — only direct \prec -successors — same instance line on front pairwise unordered — sending of asynchronous reception already in

$C\cap\mathcal{F}=\emptyset-C\cup\mathcal{F}$ is a cut — only direct \prec -successors — same instance line on front pairwise unordered — sending of asynchronous reception already in



42.66

Content

Scenarios: The Idea
 Use Cases
 Use Society
 Use Society
 A Brief History
 LSC RebySynan:
 LSC RebySynan:
 LSC RebySynan:
 LSC RebySynan:
 LSC RebySynan:
 LSC RebySynan:
 LSC RebyStaments.Coolions
 Welf-timendens
 Cath. Fredens:
 Cath. Fredens:
 Cath. Fredens:
 Locarions Symbole Buch Automata



A Successor Relation on Cuts

Cut Examples

 $\emptyset \neq C \subseteq \mathcal{L}-\text{downward closed}-\text{simultaneity closed}-\text{at least one loc. per instance line}$

The partial order " \preceq " and the simultaneity relation " \sim " of locations induce a direct successor relation on cuts of an LSC body as follows:

The $\operatorname{cut} C' = C \cup \mathcal{F}$ is called direct successor of C via \mathcal{F} , denoted by $C \leadsto_{\mathcal{F}} C'$.
$$\begin{split} &\circ C \cap \mathcal{F} = \emptyset \text{ and } C \cup \mathcal{F} \text{ is a cut. i.e. } \mathcal{F} \text{ is dosed under simultaneity,} \\ &\circ \text{ all locations in } \mathcal{F} \text{ are direct } < \text{-successors of the front of } C. \text{ i.e.} \\ &\forall I \in \mathcal{F} \exists I' \in C \bullet I' \ \ \forall I \land (\exists I'' \in C \bullet I' \land I'' \land I), \end{split}$$
Definition. Let $C\subseteq\mathcal{L}$ beta cut of LSC body $((\mathcal{L},\preceq,\sim),\mathcal{I},\mathsf{Msg},\mathsf{Cond},\mathsf{LocInv},\Theta)$. • for each asynchronous message reception in \mathcal{F} , the corresponding sending is already in C. $\forall \, (l,E,l') \in \mathsf{Mag} \bullet l' \in \mathcal{F} \implies l \in C.$ ullet locations in \mathcal{F} that lie on the same instance line are pairwise unordered, i.e. $\forall l \neq l' \in \mathcal{F} ullet (\exists l \in \mathcal{I} ullet \{l, l'\} \subseteq I) \implies l \not\preceq l' \land l' \not\preceq l,$ $\mathsf{Aset}\,\emptyset \neq \mathcal{F} \subseteq \mathcal{L}\,\mathsf{of}\,\mathsf{locations}\,\mathsf{is}\,\mathsf{called}\,\mathsf{fired}\text{-}\mathsf{set}\,\mathcal{F}\,\mathsf{of}\,\mathsf{cut}\,C\,\mathsf{if}\,\mathsf{and}\,\mathsf{only}\,\mathsf{if}$

Tell Them What You've Told Them...

- interactions between system and actors,
 beaute to disbourse exceptions and corner cases,
 in particular effective with customes taking technical background,
 User-Case Diagrams:
 windise with patients are relevant for which user-case,
 portry sadess without the underlying user-case.
- User Stories: simple example of scenarios
 strong point: naming tests is necessary,
 weak point: hard to keep overview, global restrictions.
- Sequence Diagrams:

 a visual formalism for interactions, i.e.,

- Can be used to precisely describe the interactions of a use-case.

44,4

References

4546

References

Belant, H. (1009). Linkhook de Salivarettechnik. Basislonapite und Requierrents Engineering. Spektrum, 3rd efficier.

Bed. K. (1999). Externe Programming Explained — Ernboxco Charge. Addison-Wesley.

Bed. K. (1999). Externe Programming Explained — Ernboxco Charge. Addison-Wesley.

Bed. K. (1999). Externe Programming Explained — Ernboxco Charge. Addison-Wesley.

Bed. K. (1999). Externe Programming Explained — Ernboxco Charge. Addison-Wesley.

Dumm, M. and Heal D. (2001). ESC: Extenting life in on Nestago Sequence Chart. Formal Methods in System Design, 1991; 83–90.

Heal D. and Methods. (2002). Assett and negate revisited: Modal Semantics for UML sequence diagrams.

John Chart. (2002). Assett and negate revisited: Modal Semantics for UML sequence diagrams.

Heal D. and Methods. (2002). Assett and negate revisited: Modal Semantics for UML sequence Chart MSCI, 5 edition.

John Chart. (1903). Asset Oriented Software Engineering — I Use Chart Myscock. ACM Petras. Carl von Opsie thy Universitat Coloribrius.

Ludwing, J. and Littor. (1, 2003). Seather. (1, 2003). Asset Transplant of the Specification of the Specification of Seather. (1, 2003). Seather. (1, 2003). Asset Transplant of the Specification of Seather. (1, 2003). Asset Transplant of Seathers. (